Hero

GLAMOUR XTEC



Accessories and features shown may not be a part of standard fitment.

INDIA'S FIRST 5 YEAR WARRANTY*
*Conditions apply.

OWNER'S MANUAL

PREFACE

Thank you for selecting a Hero MotoCorp **GLAMOUR XTEC CONNECT**. We wish you many miles of continued riding pleasure in the years ahead.

We at Hero MotoCorp, are committed to demonstrate excellence in our environment performance on a continual basis, as an intrinsic element of our corporate philosophy. To achieve this we commit ourselves to continue product innovations to improve environment compatibility, comply with all applicable legislation including environment legislation and strengthen the green supply chain.

Your vehicle is conforming to latest BS6 STAGE-II (OBD STAGE II-A) regulation for emission, safety & noise levels. We are also using non asbestos brake shoes/pads and engine gaskets which are environment friendly in nature.

This vehicle is fitted with a lighting feature known as "Automatic Headlamp ON". The feature is mandated for all 2 Wheelers by Ministry of Road Transport & Highways (Government of India) vide notification GSR 188 (E) dated 22nd February 2016. This feature helps in conspicuity for improving rider safety. The headlamp of this vehicle will always be lit ON when the engine gets ON.

This booklet is your guide to the basic operation and maintenance of your new Hero MotoCorp **GLAMOUR XTEC CONNECT**. Please take time to read it carefully. As with any fine machine, proper care and maintenance are essential for trouble-free operation and optimum performance.

Your Authorised Hero MotoCorp dealer will be glad to provide further information or assistance and is equipped to handle your future service needs.

Let us make this world a safer, healthier and more environment friendly place.

NOTE

ALL INFORMATION, ILLUSTRATION, PHOTOGRAPH, DIRECTIONS, SPECIFICATIONS AND OTHER CONTENTS COVERED IN THIS OWNER'S MANUAL ARE BASED ON THE LATEST PRODUCT INFORMATION AVAILABLE AT THE TIME OF ITS PUBLISHING APPROVAL, AND THE ACCURACY OR CORRECTNESS OF THE SAME IS NOT UNDERTAKEN OR GUARANTEED.

Hero MotoCorp Ltd ***RESERVES THE RIGHT TO MAKE CHANGES IN ITS CONTENTS AT ANY TIME WITHOUT NOTICE AND/OR INCURRING ANY OBLIGATION, WHATSOEVER. NO ONE IS ALLOWED TO REPRODUCE ANY PART OF THIS PUBLICATION WITHOUT OBTAINING PRIOR WRITTEN PERMISSION FROM*** Hero MotoCorp Ltd.

ACCESSORIES SHOWN MAY NOT BE THE PART OF STANDARD FITMENT. IT IS OUR ENDEAVOUR TO CONSTANTLY IMPROVE OUR PRODUCTS. THIS COULD LEAD TO CHANGE IN PRODUCT SPECIFICATIONS WITHOUT NOTICE. Hero MotoCorp Ltd ***'GLAMOUR XTEC CONNECT' COMPLIES WITH THE LATEST EMISSION NORMS.***

ADDENDUM

As per Ministry of Road Transport & Highways (Government of India) vide Notification G.S.R. 174 (E) dated 11th March, 2024, Hemostatic agent (Feracrylum 1% gel) is added in first aid kit as an addition into the existing kit.

CONTENTS

	Pg. No.		Pg. No.
VEHICLE IDENTIFICATION	1	MAINTENANCE SCHEDULE	54
VEHICLE VIEWS	2	SPARK PLUG INSPECTION	57
VEHICLE SPECIFICATION	5	ENGINE OIL	58
ACCESSORIES & MODIFICATIONS	7	ENGINE OIL FILTER ELEMENT	59
ANTI-THEFT TIPS	7	OIL FILTER SCREEN	60
VEHICLE SAFETY	8	AIR CLEANER	61
• Important safety information	8	VALVE CLEARANCE ADJUSTMENT	63
• Protective apparel	9	CLUTCH LEVER FREE PLAY	65
SAFE RIDING TIPS	10	THROTTLE OPERATION	66
TIPS FOR HEALTHY ENVIRONMENT	11	DRIVE CHAIN SLACKNESS	66
PARTS FUNCTION	12	DRIVE CHAIN SLIDER INSPECTION	69
• Ignition switch	12	BRAKES	69
• Instruments and Indicators	13	SUSPENSION	74
• LCD Panel	17	WHEEL	74
FEATURES	21	MAIN/SIDE STAND LUBRICATION	77
HANDLEBAR SWITCHES CONTROL	37	TUBELESS TYRES	78
i3s (IDLE STOP START SYSTEM)	39	NUTS, BOLTS & FASTENERS	81
SIDE STAND INDICATOR/SWITCH	41	BATTERY	81
FUEL	43	FUSE REPLACEMENT	82
SEAT LOCK	44	STOP LAMP SWITCH	83
HELMET HOLDER	45	HEADLAMP FOCUS ADJUSTMENT	84
USB CHARGER	45	CATALYTIC CONVERTER	84
PRE-RIDE INSPECTION	46	EVAPORATIVE EMISSION CONTROL SYSTEM	85
STARTING THE ENGINE	47	POLISHING OF VEHICLE	85
RIDING	49	BASIC TROUBLESHOOTING	86
BRAKING	50	ROAD SIGNS	89
PARKING	51	NAVIGATION SIGNS	91
TOOL KIT/FIRST AID KIT	51	WARRANTY	
CLEANING AND WASHING OF VEHICLE	51	HERO GENUINE PARTS	
MAINTENANCE	52	ZONAL/REGIONAL/AREA OFFICES	
SAFETY PRECAUTION	53		

VEHICLE IDENTIFICATION



Vehicle Identification Number (VIN)

Location: Stamped on the right side of the steering head tube.



Engine No.

Location: Stamped on the lower side of the left crankcase.

VIN: MBLJAW43#########

MBL	JAW43	#	#	#	#	#####
Manufacturer code	Vehicle Description	Check Digit	Model Year	Plant Code	Month of Manufacturing	Production Serial Number

Engine No.: JA07AE########

JA07AE	#	#	#	#####
Engine Description	Year of Manufacturing	Assembly Plant	Month of Manufacturing	Serial Number

Model: GLAMOUR XTEC CONNECT


Variant	VIN	Engine
Electric start/Front disc/Cast wheel	JAW43	JA07AE
Electric start/Front drum/Cast wheel	JAW37	JA07AF

VIN and Engine No. may be required:

1. During registration of the vehicle.
2. For dealing with legal & insurance departments.

VEHICLE VIEWS


TOP VIEW

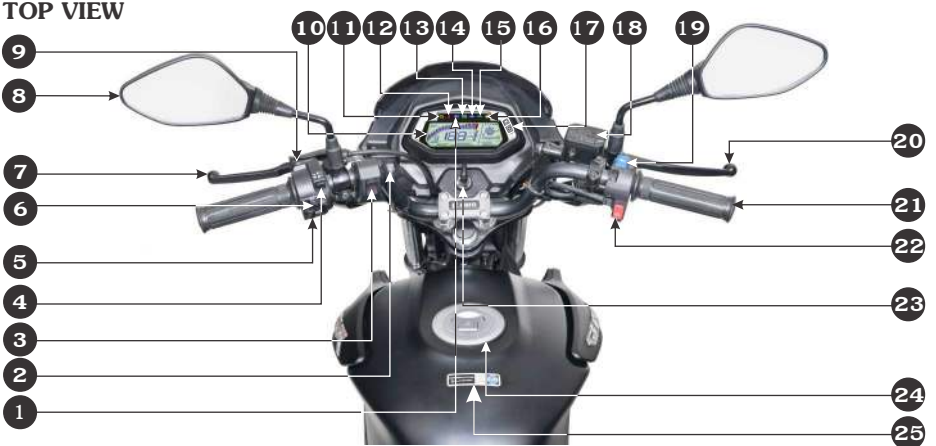

(1) High beam indicator
(2) USB charger
(3) SOS alert/Panic switch
(4) Dimmer switch
(5) Horn switch
(6) Turn signal switch
(7) Clutch lever
(8) Rear view mirror
(9) Passing switch
(10) LCD panel of Meter console. Refer instruments and indicators **(page 15)** for fuel gauge, speedometer and other features of console
(11) Programmed FI malfunction indicator lamp (MIL)
(12) Side stand indicator
(13) Neutral indicator
(14) i3s indicator
(15) Left /Right turn signal indicator
(16) Low fuel indicator
(17) Mode (M) and set (S) button
(18) Front brake master cylinder/Reservoir
(19) i3s switch
(20) Front brake lever
(21) Throttle grip
(22) Electric starter switch
(23) Ignition switch with steering lock
(24) Fuel tank cap
(25) QR code

***Accessories and features shown may not be part of standard fitment.**

LEFT SIDE VIEW

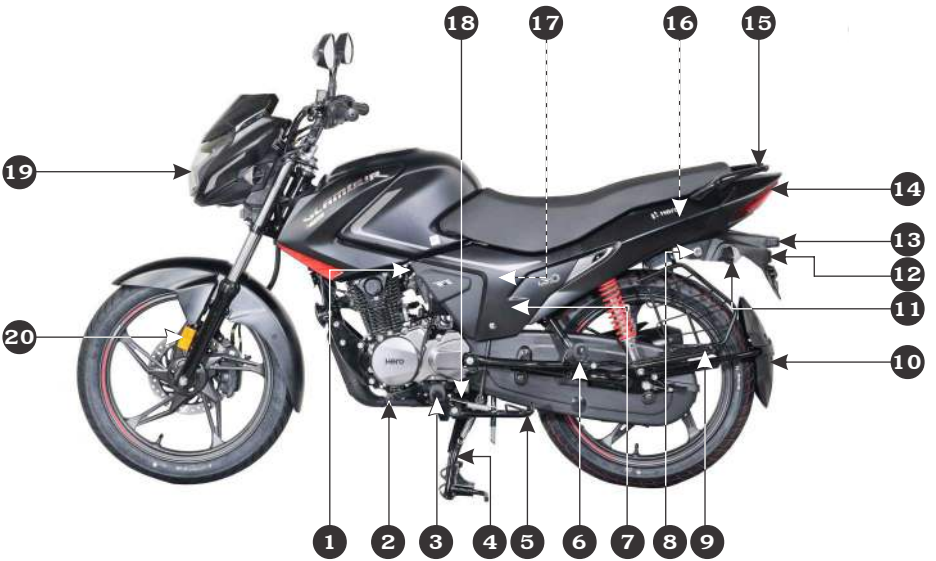

(1) Fuel injector
(2) Gear shift pedal
(3) Rider footrest
(4) Main stand
(5) Side stand
(6) Pillion footrest
(7) Left side cover
(8) Seat lock
(9) Saree guard with women pillion step
(10) Rear hugger fender
(11) Rear turn signal lamp
(12) Rear reflex reflector
(13) Licence plate lamp
(14) Tail/Stop lamp
(15) Rear grip
(16) Helmet holder (inside)
(17) Battery (inside)
(18) Side stand switch
(19) Position lamp
(20) Side reflex reflector

***Accessories and features shown may not be part of standard fitment.**

RIGHT SIDE VIEW



(1) IBS Actuator (inside)#
(2) Brake fluid reservoir#
(3) Kick starter pedal
(4) Oil level dipstick
(5) Brake pedal
(6) Starter motor
(7) Front fender
(8) Caliper assembly#
(9) Front brake disc#
(10) Front suspension
(11) Front turn signal lamp
(12) Headlamp
(13) Front visor
(14) Throttle body/ECU (inside)
(15) Seat
(16) Rear fender
(17) Rear shock absorber
(18) Exhaust muffler

#Disc variant

***Accessories and features shown may not be part of standard fitment.**

VEHICLE SPECIFICATION

ITEM		SPECIFICATIONS
Dimensions		
Overall length		1959 mm
Overall width		743 mm (Disc-Drum) & 720 mm (Drum-Drum)
Overall height		1074
Wheelbase		1273.1 mm
Saddle height		798 mm
Ground clearance		180 mm
Weight		
Kerb weight		123 kg (Disc-Drum) & 122 kg (Drum-Drum)
Payload		130 kg
Capacities		
Engine oil		0.95 litre at disassembly and 0.75 litre at draining
Fuel tank capacity		10 litres
Engine		
Maximum power		8 kW @ 7500 r/min
Maximum torque		10.6 N-m @ 6000 r/min
Bore and stroke		52.4x57.8 mm
Compression ratio		9.9:1
Displacement		124.7 cc
Spark plug		NGK-CPR6 7EA9, RG8YC (Federal Mogul)
Spark plug gap		0.8-0.9 mm
Valve clearance	Intake (cold)	0.08 mm
	Exhaust (cold)	0.12 mm
Idle speed		1400±100 r/min
Chassis and suspension		
Front suspension		Telescopic hydraulic shock absorbers
Rear suspension		Swingarm with 5 step adjustable hydraulic shock absorbers
Caster angle		26°
Trail length		92 mm
Tyre size	Front	80/100-18 47P (Tubeless tyre)
	Rear	100/80-18 53P (Tubeless tyre)

VEHICLE SPECIFICATION

ITEM		SPECIFICATIONS
Brakes	Front (Disc type)	Dia. 240 mm
	Front (Drum type)	Dia. 130 mm
	Rear (Drum type)	Dia. 130 mm
Transmission		
Primary reduction		3.35 (67/20)
Final reduction		3.214 (45/14)
Transmission		5 Speed transmission
Gear ratio, 1st		3.17 (38/12)
2nd		1.83 (33/18)
3rd		1.272 (28/22)
4rd		1.04 (26/25)
5th		0.923 (24/26)
Electricals		
Battery		*MF battery, 12V-4Ah/ETZ5
Alternator		120 W @ 5000 r/min
Starting system		Kick/Electric start
Headlamp (High/Low)		LED
Tail/Stop lamp		12V-5/21W
Turn signal lamp		12V-10Wx4 (Amber bulb) with clear lens-**MFR
Meter illumination		LED
Neutral indicator		LED
Turn signal indicator (RH + LH)		LED x 2
Position lamp		LED
Hi beam indicator		LED
i3s indicator		LED
Side stand indicator		LED
Malfunction indicator lamp (MIL)		LED
Licence plate lamp		12V-5.0W
Fuse	Circuit fuse	15A, 10A, 10A, 10A
	Spare fuse	15A, 10A

***MF stands for Maintenance Free**
****MFR stands for Multi-Focal Reflector**

ACCESSORIES & MODIFICATIONS

Modifying your vehicle or using non-Hero MotoCorp accessories can make your vehicle unsafe. Before you consider making any modifications or adding an accessory, be sure to read the following information.

⚠ WARNING

- ***Improper accessories or modifications can cause a crash in which you can be seriously hurt or killed.***
- ***Follow all instructions in this owner's manual regarding accessories and modifications.***

Accessories

- Make sure that the accessory does not obscure any lamps, reduce ground clearance, limit suspension travel or steering travel, affect your riding position or interfere with operating any controls.
- Be sure electrical equipment does not exceed the vehicle's electrical system capacity **(page 5).** A blown fuse can cause a loss of lights.
- Do not pull a trailer or sidecar with your vehicle. This vehicle was not designed for these attachments, and their use can seriously impair your vehicle's handling.

Modifications

We strongly advise you not to remove any original equipment or modify your vehicle in any way that would change its design or operation. Such changes could seriously impair your vehicle's handling, stability and braking, making it unsafe to ride. Removing or modifying your lamps, mufflers, emission control system or other equipment can also make your vehicle illegal.

ANTI-THEFT TIPS

- Always lock the steering and never leave the key in the ignition switch. This sounds simple but people do forget.
- Be sure the registration information for your vehicle is accurate and correct.
- Park your vehicle in a locked garage whenever possible.
- Use an additional anti-theft device of good quality.
- Never park your vehicle in an isolated area. Park as far as possible in a designated area.
- Keep a note in your vehicle all the time with your name, address and contact details.

VEHICLE SAFETY

IMPORTANT SAFETY INFORMATION

Your vehicle can provide many years of service and pleasure if you take responsibility for your own safety and understand the challenges you can meet on the road.

There is much that you can do to protect yourself when you ride. You will find many helpful recommendations through out this manual. Following are a few that we consider most important.

Always wear a helmet

It is a proven fact, helmet significantly reduces the number and severity of head injuries. So always wear a helmet and make sure your pillion rider does the same. We also recommend that you wear eye protection, sturdy boots, gloves and other protective gear.

Before riding your vehicle

Make sure that you are physically fit, mentally focused and free of alcohol and drugs. Check that you and your pillion are both wearing an approved vehicle helmet and protective apparel. Instruct your pillion on holding onto the grab rail or your waist, leaning with you in turns, and keeping their feet on the footrest, even when the vehicle is stopped.

Take time to learn & practice your vehicle

Even if you have ridden other vehicles, practice riding in a safe area to become familiar with how this vehicle works and handles, and to become accustomed to the vehicle's size and weight.

Hero RideSafe

Ride defensively

Always pay due attention to other vehicles around you, and do not assume that other drivers see you. Be prepared to stop quickly or perform an evasive maneuver.

Make yourself easily visible

Some drivers do not see vehicles because they are not looking for them. To make yourself more visible, wear bright reflective clothing, position yourself so that others can see you, signal before turning or changing lanes, and use horn which will help others to notice you.

Ride within your limits

Pushing the limits is another major cause of vehicle accidents. Never ride beyond your personal abilities or faster than conditions demand. Remember that fatigue and negligence can significantly reduce your ability to make good judgements and ride safely.

Do not drink and ride

Riding under the influence of alcohol or drugs is dangerous. Alcohol can reduce your ability to respond to changing conditions and reduce the reaction time. Do not drink and ride.

Keep your vehicle in safe condition

For safe riding, its important to inspect your vehicle before every ride and perform all recommended maintenance. Never exceed load limits, and use accessories that have been recommended by Hero MotoCorp for this vehicle.

If you are involved in a crash

Personal safety is your first priority. If you or anyone else has been injured, take time to assess the severity of the injuries and whether it is safe to continue riding. Call for emergency assistance if needed. Also follow applicable laws and regulations if another person or vehicle is involved in the crash.

If you decide to continue riding, first evaluate the condition of your vehicle. If the engine is still running, turn it off. Inspect for fluid leaks, check the tightness of critical nuts and bolts, and check the handlebar, brake levers, brakes, and wheels. Ride slowly and cautiously. Your vehicle may have suffered damage that is not immediately apparent. Have your vehicle thoroughly checked at a qualified service facility as soon as possible.

PROTECTIVE APPAREL

For your safety, we strongly recommend that you always wear an approved helmet (ISI marked), eye protection, boots, gloves, long pants and a long sleeve shirt or jacket whenever you ride. Take care of loose/ hanging clothes while solo/pillion riding. Although complete protection is not possible, wearing proper gear can reduce the chance of injury when you ride.

Following are suggestions to help you choose proper riding gear.

⚠ WARNING

- ***Not wearing a helmet increases the chance of serious injury or death in a crash.***
- ***Be sure you and your pillion always wear a helmet, eye protection and other protective apparel when you ride.***

Helmets and eye protection

Your helmet is your most important piece of riding gear because it offers the best protection against head injuries. A helmet should fit your head comfortably and securely. A bright coloured helmet can make you more noticeable in traffic, as can reflective strips.

An open-face helmet offers some protection, but a full-face helmet offers more. Always wear face shield or goggles to protect your eyes and help your vision.

Additional riding gear

In addition to a helmet and eye protection, we also recommend:

- Sturdy boots with non-slip soles to help protect your feet and ankles.
- Leather gloves to keep your hands warm and help prevent blisters, cuts, burns, and bruises.
- A two wheeler riding suit or jacket for comfort as well as protection. Bright coloured reflective clothing can help make you more noticeable in traffic. Be sure to avoid loose clothes that could get caught on any part of your vehicle.

SAFE RIDING TIPS

Do's:

- Always conduct simple pre-ride inspection **(page 46)**.
- Always wear a helmet (ISI marked) with chin strap securely fastened and insist on a helmet for your pillion rider.
- While riding, sit in a comfortable position with your legs close to fuel tank.
- Ride defensively and at a steady speed (between 40-50 km/hr).
- To stop the vehicle (in IBS), press the rear brake pedal for the application of front and rear brakes simultaneously. However, for more effective braking, use both brakes simultaneously, keeping throttle in the closed position.
- Respect road signs and obey traffic rules for your own safety and that of others on the road **(page 89)**.
- During night time, dip headlamps of your vehicle for oncoming traffic, or when following another vehicle.
- Give way to others on the road and signal before you make a turn.
- To make yourself more visible, wear bright reflective clothing that fits well.
- Tightly wrap loose/hanging clothes & avoid entangling with moving parts.
- Get your vehicle serviced regularly by the Authorised Hero MotoCorp workshop.
- Before riding make sure in which mode you are riding whether with i3s switch "ON" or "OFF".

Don't

- Never use cell phone while riding the vehicle.
- Avoid sudden acceleration, braking and turning of your vehicle.
- Never shift gears without disengaging the clutch and closing the throttle.
- Never touch any part of the hot exhaust system like muffler.
- Never ride under the influence of alcohol or drugs.
- Concentrate on the road and avoid talking to the pillion rider or others on the road.
- Do not litter the road.
- Do not cross the continuous white/yellow line in the center of the road, while overtaking.
- Do not attach large or heavy items to the handlebars, front forks, or fenders.
- Never take your hands off the steering handle while riding.
- Do not move the side stand down while riding, as engine will stop while vehicle is in gear **(page 42).**
- Navigation system assists you to reach your destination, don't be distracted while driving. Drive safely and always obey traffic rules.

TIPS FOR HEALTHY ENVIRONMENT

The following tips shall ensure a healthy vehicle, healthy environment, and a healthy you.

- **Healthy engine:** The engine is the lifeline of every vehicle. To keep it healthy, it should be tuned regularly, which will also help reduce pollution and improve vehicle performance & fuel efficiency.

- **Regular servicing:** Get your vehicle serviced at an Authorised Hero MotoCorp workshop, as per the service schedule, for an optimum performance and keep the emission level under check.

- **Genuine spares:** Always insist on Hero MotoCorp genuine parts as spurious or incompatible spares and accessories can upset or deteriorate your vehicle's running condition.

- **Genuine engine oil:** Hero 4T Plus SAE 10W 30 SL grade (JASO MA2) engine oil recommended by Hero MotoCorp and make sure you change it every 6000 km. (with top up every 3000 kilometres) to keep the engine fit and environment healthy.


- **Noise pollution :** Noise beyond a certain decibel is pollution. Whether it is from horns or defective mufflers, excessive noise will cause headaches and discomfort.

- **Emission pollution:** Get emission of your vehicle checked by Authorised agencies atleast once every 6 months or as notified by the government from time to time.

- **Fuel saving & Reduce pollution :** Switch "OFF" the engine while waiting at traffic signal points to save fuel and reduce pollution, if the waiting period is long.

- **BS-VI grade fuel :** Always use BS-VI grade fuel to adhere BS-VI norms.

PARTS FUNCTION
Ignition switch

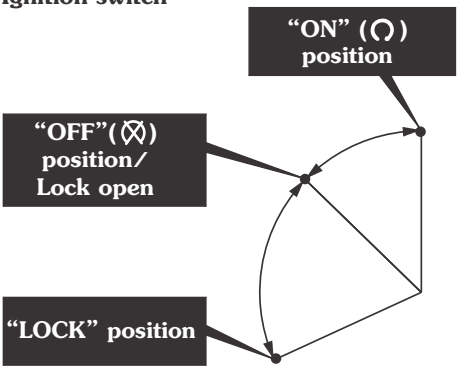




(1) Ignition switch
(2) Ignition key
(3) Steering lock position

Key position	Function	Key removal
"ON" (⏻)	The LCD panel illuminates & initial display of multi function digital segments are displayed. The tachometer segment and the fuel gauge segment will swing to the maximum scale once and back to its normal position. The engine can be started. Turn signal lamp, horn, tail/stop lamp, fuel gauge, pass lamp, position lamps & neutral indicator will be functional. Programmed FI malfunction indicator lamp (MIL) illuminates continuously and i3s indicator glows for 2 seconds.	Key cannot be removed
"OFF"(⊗)	Engine cannot be started and no electrical system will be functional.	Key can be removed
"LOCK"	Steering can be locked.	Key can be removed

INSTRUMENTS AND INDICATORS

The indicators are in the speedometer panel above the headlamp. The functions are as below.

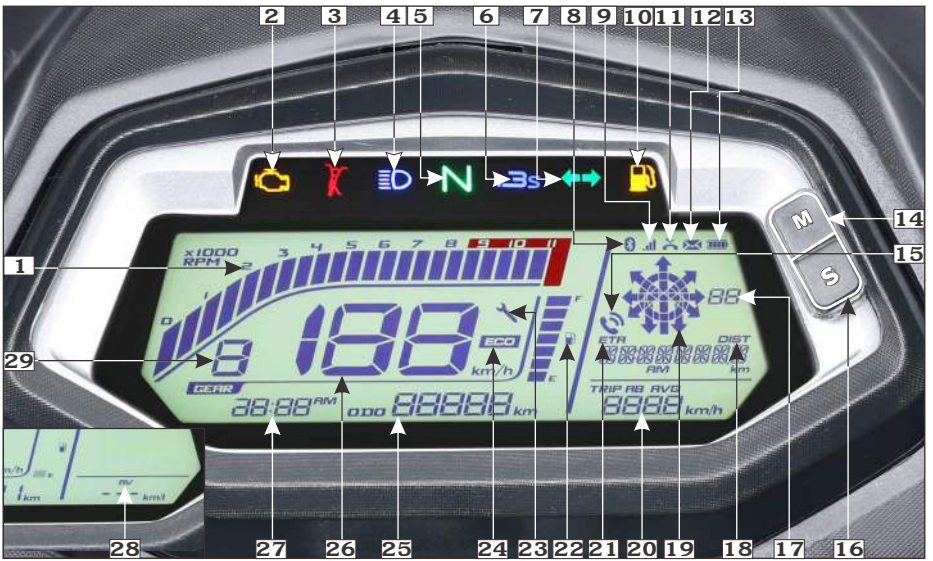

Sl. No.	Description	Function
1	Tachometer	Shows engine revolution per minute. The tachometer digital segments will swing to maximum scale on the meter console once the ignition switch is turned “ON” .

Sl. No.	Description	Function
2	Malfunction indicator lamp (MIL)	When the ignition switch is turned "ON" the malfunction indicator lamp (MIL) glows continuously and then should go "OFF" once the engine is started. It indicates that vehicle is OK. If it glows continuously there is an abnormality in the vehicle, it is recommended to reduce the speed and drive to the Authorised Hero MotoCorp workshop for check-up.
3	Side stand indicator	Light glows when the vehicle is parked on the side stand.
4	High beam indicator	Light glows when headlamp is in high beam.
5	Neutral indicator	Light glows when vehicle is in neutral.
6	i3s indicator	Indicator glows for 2 seconds and turns "OFF" indicating that i3s system is functional.
7	Turn signal indicator Left/Right	Flashes when left/Right turn signal switch is operated.
8	Bluetooth	On pairing with Hero app **(page 22)**, the meter console displays a bluetooth symbol, indicating bluetooth is connected.
9	Phone network strength	It will display the phone network strength status on the meter console **(page 26)**.
10	Low fuel indicator	Light glows when the fuel quantity is low **(page 20).**
11	Missed call alert	You will get all the missed call alert on the meter console once your smartphone is paired with the vehicle via Hero app **(page 25)**.

Sl. No.	Description	Function
12	Message alert	You will get all the message alert on the meter console once your smartphone is paired with the vehicle via Hero app **(page 25)**.
13	Phone battery status	Display battery status of smartphone on the meter console once your smartphone is paired with the vehicle via Hero app **(page 26)**.
14	Mode button	Switches display between odometer, tripmeter-A & B, RTMI mode, range & appearance.
15	Incoming call alert	You will get all the incoming call alert on the meter console once your smartphone is paired with the vehicle via Hero app **(page 24)**.
16	Set button	To adjust clock & when long pressed resets tripmeter to zero.
17	Round about exist	Displays the number of round about exists during navigation.
18	Navigation next move distance	Once the navigation is started via Hero app **(page 27)** meter console will display the distance for next move to the location.
19	Navigation	Displays turn by turn navigation guidance/direction through navigation signs once cluster receives the navigation data via Hero app **(page 27)**.
20	Tripmeter A & B	Shows the distance travelled during a trip after setting to zero **(page 18)**.
21	ETA (Estimated time of arrival)	Once the desired location is enter in navigation via Hero app **(page 27)** meter console will ETA (Estimated time of arrival) to the location.


Sl. No.	Description	Function
22	Fuel gauge	Indicates approximate fuel available in the form of digital segments. The digital segments will swing to maximum scale on the meter console once the ignition switch is turned "ON" (Ω) **(page 19).**
23	Service reminder indicator	Displays when the next service is due **(page 20).**
24	Eco mode	Indicates that vehicle is running in the fuel economy range which gives better mileage **(page 21)**.
25	Odometer	Shows accumulated distance travelled **(page 18).**
26	Speedometer	Indicates riding speed**.**
27	Digital clock	Indicates hours & minutes **(page 17)**.
28	Real time mileage indicator (RTMI)	It indicates the current mileage of the vehicle (in km/litre). The indication will change after every 3±1 seconds depending upon the driving condition **(page 19)**.
29	Gear indicator	Displays the selected gear while riding **(page 21).**

LCD PANEL

(a) Digital clock


Digital clock (1) shows hour and minute. To adjust the time, proceed as follows :

- Turn the ignition switch "ON" (O).
- Press and hold set button (2) and mode button (3) simultaneously for more than 2 seconds. The clock will be set in the adjust mode with the hour's digit display blinking.

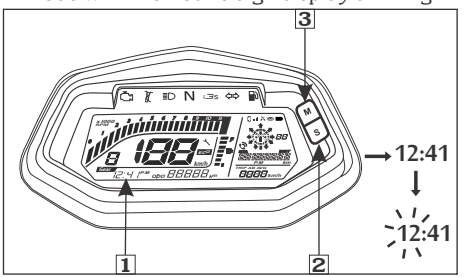


(1) Digital clock **(2) Set button**
(3) Mode button

- To set the hour, press set button (2) until the desired hour is displayed.
  - The time is advanced by 1 hour each time the button is pressed.
  - The time advances fast when the button is pressed and held.

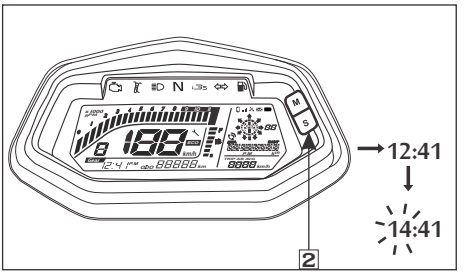

(2) Set button


- Press the mode button (3). The minutes display starts blinking.

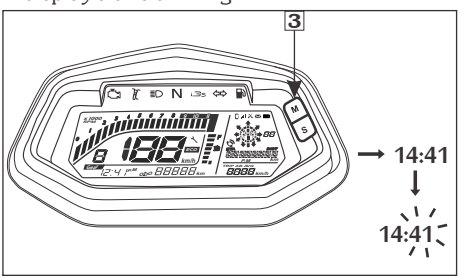

(3) Mode button

- To set the minute press set button (2) until the desired minute is displayed. The minute display will return to "00" when "60" is reached without affecting the hour display.
  - The time advances by 1 minute, each time the button is pressed.

• The time advances fast when the button is pressed and held.

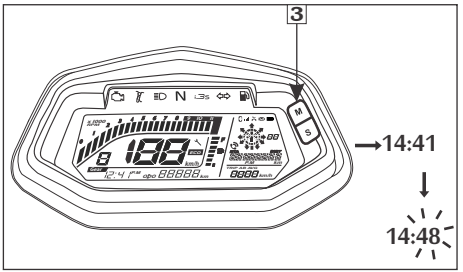

(3) Mode button

• To end the adjustment press the mode button (3) until clock display stops blinking.

NOTE

- ***The clock will reset to "1:00" if the battery is disconnected.***
- ***If mode or set buttons are not operated for 30 seconds or more, the setting will be invalid and return to the normal operation. When ignition switch is turned "OFF", the value immediately before "OFF" shall be set.***

(b) Odometer/Tripmeter

The odometer (1) shows accumulated distance travelled.

The tripmeter (2) shows distance travelled since trip meter was reset last time. There are two tripmeters, "Trip-A" and "Trip-B".


Push the mode button (3) to select "Trip-A" and "Trip-B". "Trip-A" and "Trip-B" can be displayed upto "999.9" km.

If the tripmeter exceeds "999.9" km it will return to "0.0" km automatically.

Press mode button and trip meter will display the following parameters:

- **Distance**: distance covered in a trip A and trip B.
- **Avg Speed (4)**: average speed at which vehicle completes at trip A and trip B .

When tripmeter is selected, long press (more than 2 seconds) the set button (5) to reset tripmeter to zero. The odometer can be displayed from "0 to 99999" km.

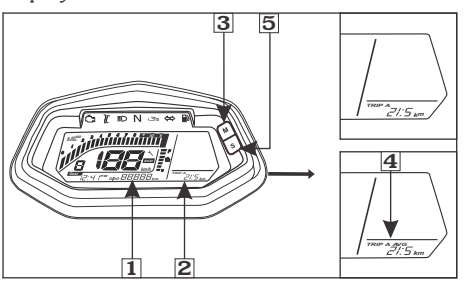


(1) Odometer **(2) Tripmeter**
(3) Mode button **(4) Avg speed**
(5) Set button

(c) Fuel gauge

The fuel gauge (1) indicates approximate fuel available in the form of digital segments.

The digital segments (2) will swing to maximum scale on the meter console once the ignition switch is turned "ON" (). If all the segments are displayed it means fuel quantity in the fuel tank is 10 litres.

If only one segment (3) is displayed and blinks, this indicates the fuel quantity is low and the fuel tank should be refilled as soon as possible.

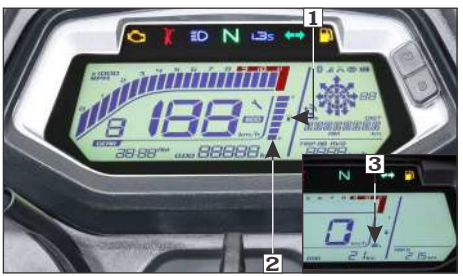

(1) Fuel gauge **(2) Segments**
(3) One segment

CAUTION

Please ensure the vehicle is not used continuously when the fuel level indicator reaches the one segment blinking. It will not only result in the vehicle running out of fuel, it may also cause serious damage to the fuel pump. Please ensure fuel is filled up as soon as the fuel level indicator reaches one segment blinking.

NOTE

To check the fuel level indication, the vehicle should be on levelled surface and in stationary condition.

(d) Real time mileage indicator (RTMI)

The real time mileage indicator (RTMI) (1) shows the current mileage of the vehicle in km/litre and is refreshed after every 3 seconds. Press the mode button (2) until RTMI is displayed.

When the ignition switch is turned "ON" () position, the real time mileage indicator will temporarily show the digit **"0.0"** km/litre The display range is from (km/litre).



(1) Real time mileage indicator (RTMI)
(2) Mode button


The fuel consumption shall be displayed when the speed of the vehicle is 5±2 km/hr. If the speed is less then 5±2 km/hr **"0.0"** km/litre will be displayed.

The RTMI shows a minimum value of **"0.0"** km/litre and maximum value of **"120"** km/litre. During coasting with throttle fully closed, the fuel consumption is very minimal and hence the display can go up to **"120"** km/litre.

(e) Service reminder indicator

The service reminder indicator (1) is to indicate the user to bring the vehicle to an Authorised Hero MotoCorp workshop for service. The indicator shall start blinking when the vehicle covers kilometers as specified in the maintenance schedule. The indicator will keep on blinking throughout the kilometer interval for a particular service and will stay ''ON'' thereafter.

Meter console also displays the next service distance (2). It indicates how many kilometers are left before the next service is due. It appears for few seconds when the ignition switch is turned "ON" (ON).

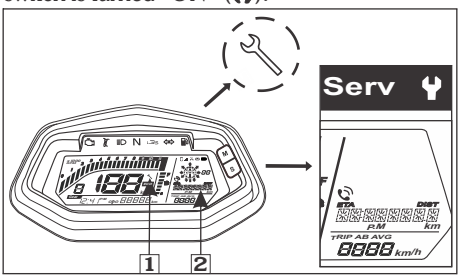

(1) Service reminder indicator
(2) Next service distance

The service reminder indicator " " can be reset at an Authorised Hero MotoCorp workshop.

NOTE

After getting the vehicle serviced, make sure that the Service Reminder Indicator has been reset.

LOW FUEL INDICATOR

Low fuel indicator (1) is a warning indicator for the user to fill the fuel as soon as possible.



(1) Low fuel indicator

CAUTION

Please ensure the vehicle is not used with low fuel indicator glowing continuously. It will not only result in the vehicle running out of fuel, but may also cause serious damage to the fuel pump. Please ensure fuel is refilled as soon as the low fuel indicator starts glowing.

NOTE


To check the fuel level indication, the vehicle should be on levelled surface and in stationary condition.

FEATURES

(a) ECO mode

ECO mode assists the rider to achieve optimum fuel efficiency.

Press the mode button (1) until ECO mode (2) is displayed.

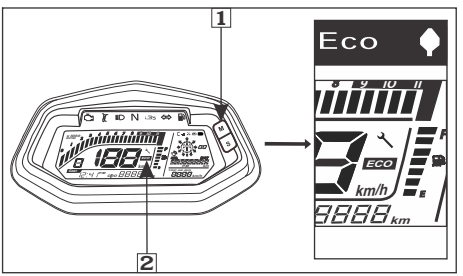

(1) Mode button **(2) Eco mode**


NOTE

ECO mode assists the rider to achieve optimum fuel efficiency based on your vehicle's engine performance.

It is recommended to ride your vehicle as per road and traffic conditions.

(b) Gear indicator

Gear indicator (1) indicates current gear condition of your vehicle in which it is running.

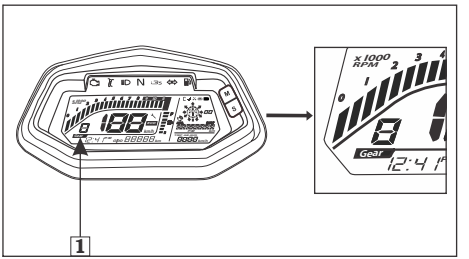

(1) Gear indicator

NOTE


- ***Gear indicator displays "0" when your vehicle is in neutral.***
- ***Gear indicator displays "–" when it delays in displaying the gear indication or when you change gears in vehicle static condition (vehicle is in main stand and ignition switch is in "ON" position).***

(c) Hero App Application:

Hero App is available in the google play store (for androids) or App Store (for iOS), which can be installed in your device to access bluetooth, incoming calls alerts, missed call alerts, mobile battery status and message alert and navigation features.


To connect your device proceed as follows:

- Open Hero App on your smartphone.
- Application asks the user to login (1) using registered mobile number.
- Now user will receive the 6-digit OTP on registered mobile number.
- User required to enter the 6-digit OTP (2) and verify.

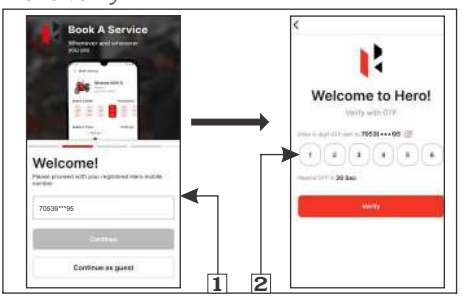

(1) Login **(2) Enter OTP**

- Select the vehicle and click on "Continue" (4).

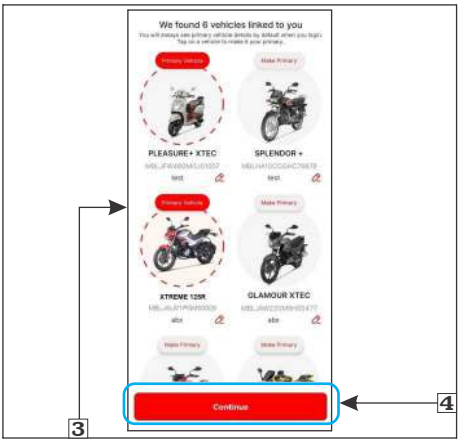

(3) Select vehicle screen **(4) Continue**

NOTE


- ***Compatibility and performance of Hero App may vary based on your device and software version.***
- ***Application needs GPS signal, internet and bluetooth connectivity to perform the desired navigation functionality.***


- After successful verification, select vehicle screen (3) will be replicated on mobile screen. Tap on the vehicle image to continue.

- For first time pairing, allow the application to access:


a. Device location.
b. Bluetooth connectivity.
c. App background running (optional).
d. Phone call logs on your device.
e. Contacts.
f. Make and manage phone calls.
g. Send and view SMS messages.




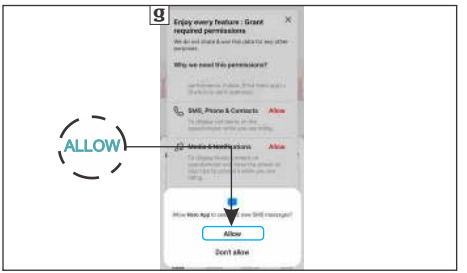

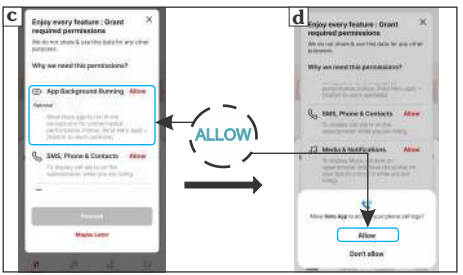

- On pairing, meter console displays bluetooth symbol (5) which indicates that bluetooth is connected .
- If any error occurs during the course of pairing process, then meter console will not display bluetooth symbol. Repeat the above steps and keep your smartphone closer to the vehicle to reconnect.

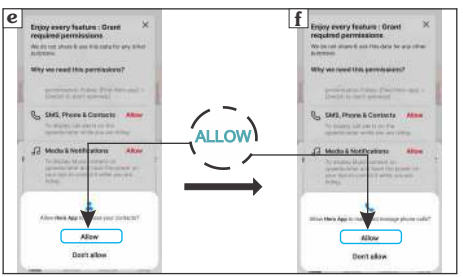

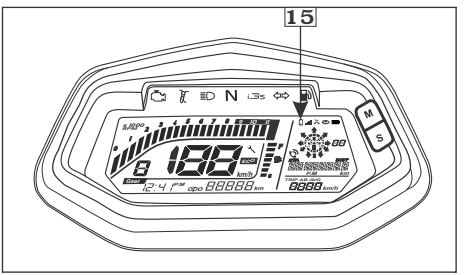

(5) Bluetooth connected

Autopairing

Your vehicle is equipped with autopairing feature by which if you turn ''OFF'' vehicle's ignition switch after successful pairing with Hero App, it will reconnect automatically once ignition switch is turned ''ON''.


NOTE

- ***Always keep your smartphone close to your vehicle during the course of pairing, autopairing and navigation.***
- ***Application need to be running in the background.***

Various features of Hero App are as follows:


- **Incoming call alert**

When smartphone is paired with Hero App **(page 22)**, then you will get all the incoming calls alerts (1) on the meter console. It will display the name of the caller if it is stored in your compatible smartphone. For example: If caller's number is stored in your compatible smartphone by name of Vijay, then your meter console will display Vijay calling (1).

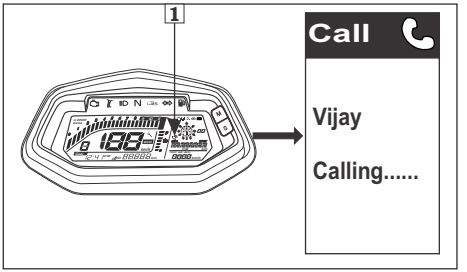

(1) Incoming call alert by name


If the number is not saved in your device by name or your device is an iOS, then it will display "unknown calling" (2).

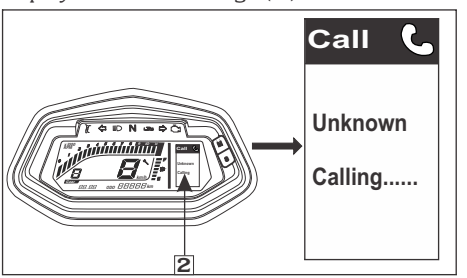

(2) Incoming call alert by unknown number

• **Missed call alert**

When smartphone is paired with Hero App **(page 22)**, then you will get all the missed calls alerts (1) on the meter console.

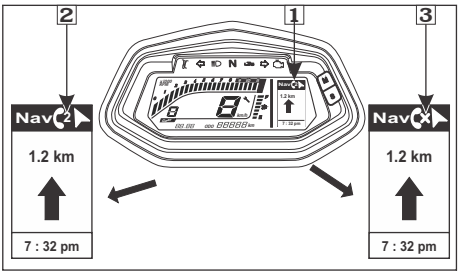


(1) Missed call alert
(2) Number of missed call (1 to 9)
(3) Number of missed call (more than 9)

- If number of missed call are less than or equal to 9 then it will display number of missed calls as respective digit (2).
- If number of missed call are more than 9 then it will display as "X" (3).

• **Message alert**

When smartphone (android) is paired with Hero App **(page 22)**, then you will get all the message alerts (1) on the meter console.

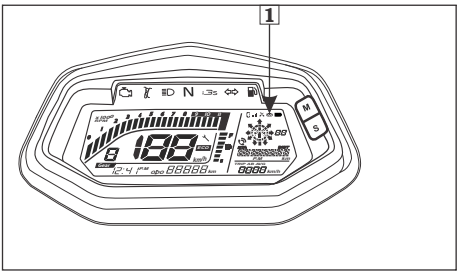


(1) Message alert

• **Phone battery status**

When smartphone is paired with Hero App **(page 22)**, then it will display phone battery status (1) of your smartphone on the meter console.

In meter console:


4 bar display – 80-100%
3 bar display – 60-79%
2 bar display – 40-59%
1 bar display – 20-39%
1 bar blink with outer line display – 1-19%.

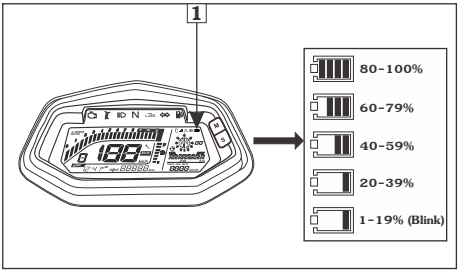

(1) Phone battery status on meter console

- **Phone network strength**

When smartphone is paired with Hero App **(page 22)**, then it will display phone network strength (1) of your smartphone on the meter console.

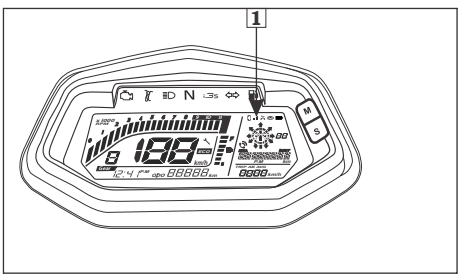


(1) Phone network strength on meter console

- **Navigation:**


To use navigation feature proceed as follows:

- Open the Hero App **(page 22).**
- Click on navigation (1) in the dashboard of Hero App.

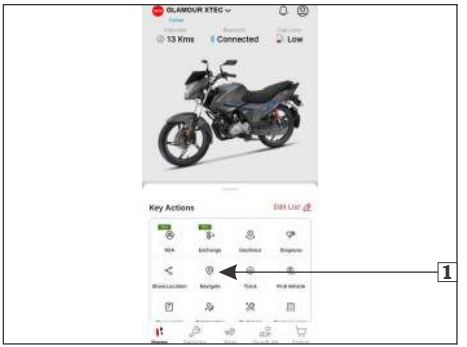


(1) Navigate on Hero App

- User will search the destination (2) on the Hero App.

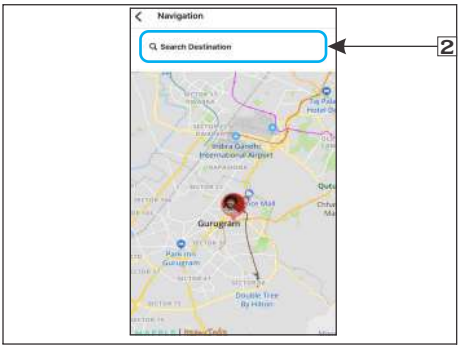


(2) Search the destination

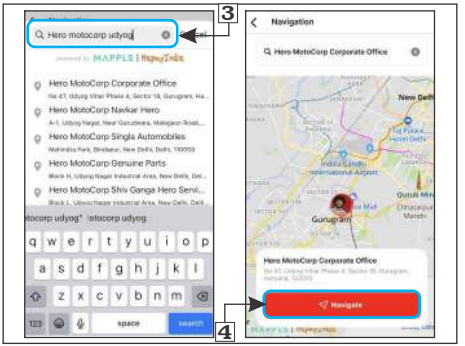

(3) Search result **(4) Navigate**

- Application shows the search result (3) of the addresses, User can select the address to find and check the route.
- Once route found user have to click on 'Navigate' (4) and the route suggestion will show in the map.
- Now user can view the turn by turn navigation on meter console of the vehicle.
- After clicking on navigate, meter console will display the direction (5), distance for next move (6) and estimated time of arrival (ETA) (7). Estimated time of arrival will be displayed in "am"or "pm". Hero App and meter console of your vehicle will display step by step navigation guidance/direction through navigation signs **(page 91).**

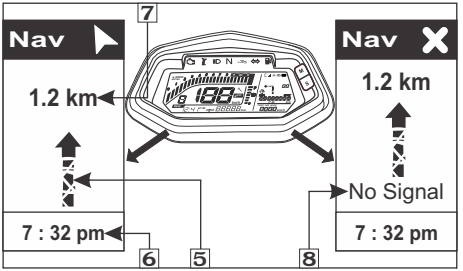

(5) Direction (6) Distance for next move
(7) ETA (8) No signal

NOTE


At any point, if Navigation system loses signal, then it displays "No Signal" (8) on meter console when vehicle is in navigation mode.

WARNING

Navigation system assists you to reach your destination, don't be distracted while driving. Drive safely and always obey traffic rules.

- **Ignition "ON/OFF" alert:**

1) Ignition "ON" alert: Whenever the vehicle ignition is "ON" by the user, Hero App will show pop-up in 45 seconds in good network condition. If the network is not good, TCU may take more than 45 seconds to come online and to send ignition "ON" alert pop up. TCU functionality depends on TCU network.

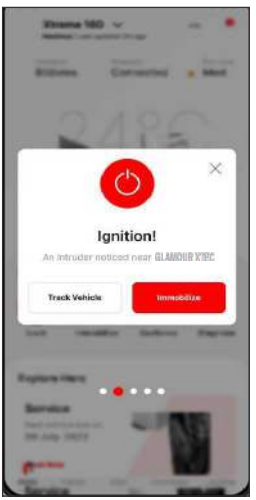

TCU is in ignition "ON" mode, when the vehicle ignition is "ON". TCU will remain in ignition "ON" mode until the ignition switch of the vehicle is turned "OFF".

2) Ignition "OFF" alert: As soon as the vehicle ignition is switched "OFF" by the user, TCU initiate to enter into the sleep mode. However, TCU waits for 15 seconds before initiating the sleep mode after switching "OFF" the vehicle. In case, if the ignition is switched "ON" again within 15 seconds than the TCU will not initiate the sleep mode.

Once TCU enters sleep mode, its status is shown as ignition "OFF" on Hero App. Usually TCU takes 2 minutes to enter sleep mode. However, in bad network condition TCU may take up to 4 minutes to enter sleep.

- **Device unplugged alert:**

Device unplugged alert pop-up is shown in the Hero App, whenever the TCU power connector is disconnected or aux battery is removed from the vehicle during its ignition "OFF" condition. When the TCU external power supply is disconnected than it enters to internal battery mode and sends unplugged alert to the Hero App. There are following requirements for device unplugged detection:

- TCU battery should be fully charged.
- If the above point does not meet than TCU battery should have enough charging to connect with the server.

NOTE

At complete discharge state of TCU battery. TCU takes minimum 2 hours to charge the battery to a level where it has enough charge to connect with the server for sending the alert pop-up.


There are following timing events for TCU internal battery mode:

- When the TCU is activated, it takes less than 15 seconds to send the unplug alert.
- When the TCU is in sleep mode, it takes nearly 45 seconds for the unplug alert to be sent.
- TCU may take some time for the unplug alert to be sent when the network is not good.
- TCU enables internal battery charging only when vehicle ignition is "ON".
- TCU battery lasts up to 2 hours when it is fully charged.
- TCU takes nearly 6 hours to fully charge the internal battery.

In case if TCU SIM supports dual operator, battery backup may be less as supporting dual operator requires more power in low or no network condition. GSM modem consumes more power while latching between two different supported networks.

- **Towing/Theft detection:**

Towing or theft mode detection only works when the ignition of the vehicle is "OFF". To enter tow mode, the vehicle must be at least 100 meters from where it was last stopped or parked by the user.

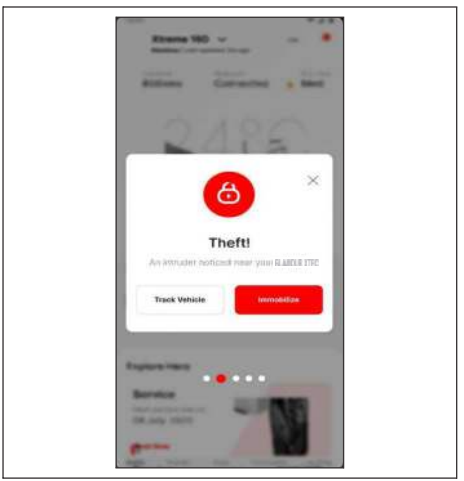


- **Fall-Down/Topple Detection:**

TCU has vehicle toppled/fall-down detection feature. When the vehicle is tilted beyond the limit and fallen down than immediately after 15-20 seconds an alert will send to the selected person along with the user location. Buzzer noise will be activated continuously at vehicle topple detection.


There are the following preconditions for the topple detection:

- Vehicle tilt angle should be more than 50° from its default standing position
- Vehicle must remain in topple position for at least 5 seconds.
- Vehicle speed must be less than 6 km/h and GPS signal must be available.
- Vehicle topple detection will be activated at both ignition "ON" & ignition "OFF" mode.

Once the vehicle is tilted more than 50° and topple is generated than it will not generate again till vehicle comes back to its normal position for at least 3 to 4 seconds.

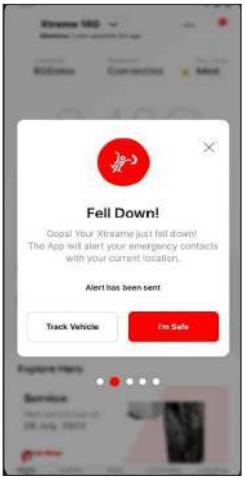

- Vehicle must remain in topple position for at least 5 seconds.
- Vehicle speed must more than 6 km/h for 10+ seconds before detecting topple.

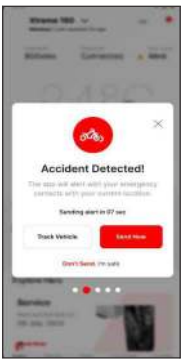

- **Accident Detection:**

TCU has vehicle accident detection feature. When the vehicle encounters an accident than the device sends last known vehicle location and accident alert to your emergency contact. Buzzer noise will be activated continuously at vehicle accident detection.


There are following preconditions for accident detection:


- Vehicle topple angle should be more than 50° from its default standing position.

Once accident detection is generated then it will generate next alert only after turning the ignition switch to "OFF"position and then back to "ON" position and vehicle comes back to normal position.

- **Low battery alert:**

TCU will send low battery or battery remove alert, when the auxiliary battery voltage goes below 12.4 V.

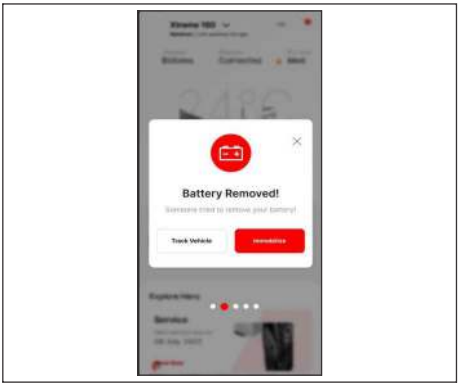

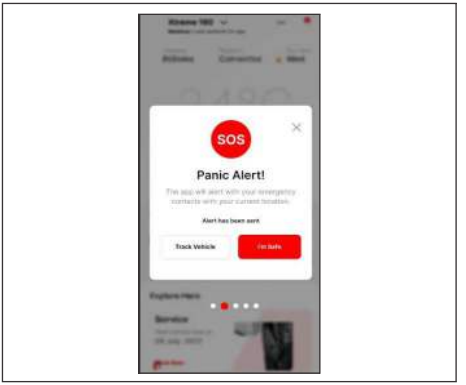

- **SOS alert:**


SOS alert is the safety feature. SOS alert will be initiated only when the vehicle ignition is "ON". Once the SOS alert switch is pressed, the Hero App will alert the rider's emergency contact saved in application along with the rider's current location **(page 38)**.

- **Remote immobilization:**

Remote immobilization is a safety feature that stops unauthorized vehicle movement by sending data to user for tracking and recovery after the vehicle is stolen.

There are the following points to remember by the user for the remote immobilization:


- User can activate immobilizer through the application which sends command to server.
- Server sends the command to TCU where it sends immobilization request to other ECUs.
- After successful immobilization, TCU sends acknowledgment back to server, from there, user gets success message on application.
- The vehicle can be re-mobilized, again through application.

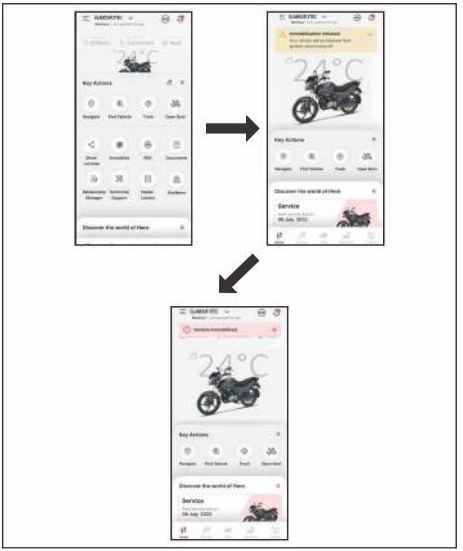

NOTE

- ***Vehicle will be immobilized, if vehicle speed is less than 3 kmph.***
- ***Users to turn the ignition switch to "OFF" position and then back to "ON" position whenever vehicle re-mobilize command is sent from Hero App to come into effect.***


- If vehicle is not online, Hero App will show message of "offline" on application.

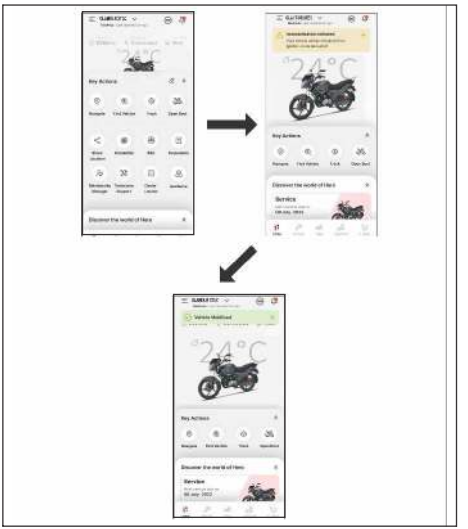

- **Track log/Trip Records:**


During every trip, the trip data like distance travelled, drive time, top speed, average speed and driving score are stored in the TCU as track data, which is then uploaded to the cloud once the trip is ended. Based on how rider is riding the vehicle, driving score of the user is generated.

Trip is created during a valid ignition “ON” and “OFF” cycle. Hero App server keeps record of last 12 months of data received from TCU. All trip data for last 6 months can be seen in the trip section.

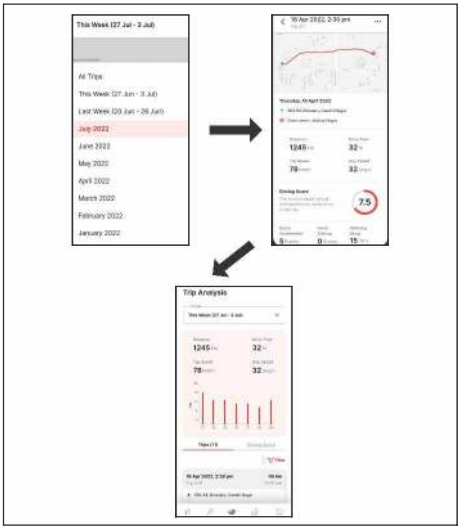

- **Live Tracking:**

When vehicle ignition is turned “ON”, TCU sends live GPS location to server and user can view these locations on Hero App.

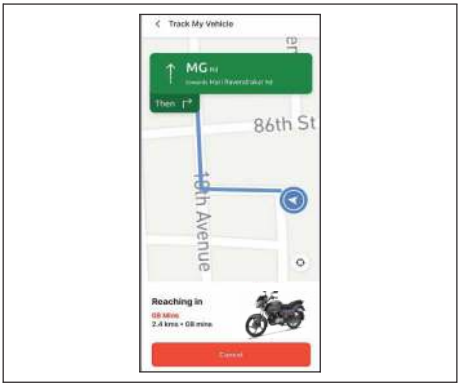


- **Vehicle Over-Speed Alert:**

TCU sends vehicle speed alert whenever vehicle crosses speed limit configured by the user in Hero App. Speed alert can be configured by the user using the application.

There are following speed limits which can be configured by the user:

- Minimum: 40 Km/h
- Maximum: 120 km/h
- Default: 80 km/h

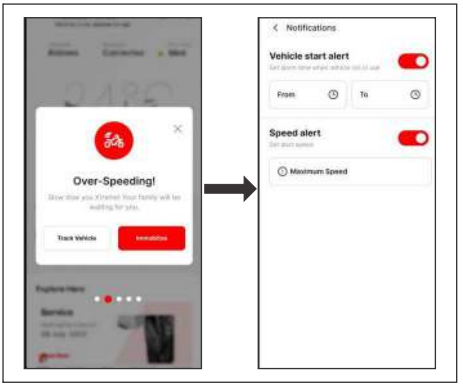


- **Vehicle Geofence Alert**

TCU supports geofence alerts. Geofence responds when the vehicle enters or leaves the particular area. Once the user configures geofence alert, user will get geofence breach alert on Hero App whenever the vehicle breaches the geofence. Geofence breach alert will be shown in alert section.

Geofence shutdown feature:

Vehicle will be turned "OFF", if geofence shutdown feature is activated in Hero App & vehicle is crossing beyond the geofence mapped area. The minimum set range for immobilize on breach action of the vehicle, which a user can configured is 5 km from the vehicle to the side of the square.

The geofence range can be changed as per the user requirement in the Hero App.

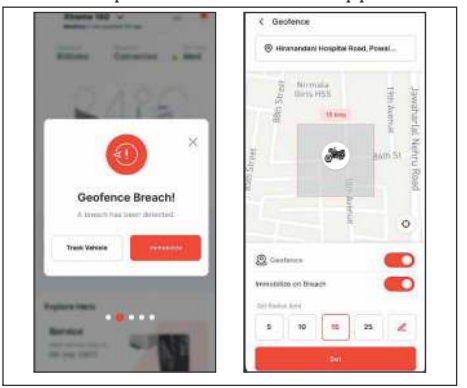

- **TCU Firmware over-the-air (FOTA)**

FOTA is a secure mechanism to update TCU's firmware, hereby enabling remote bug fixing and introducing new features to the device. User will be notified whenever a new firmware of TCU is available for the vehicle.


After successfully firmware downloading and validation, server will request to user to confirm the firmware update and start the firmware update in the TCU.


- **Find my Vehicle (via Bluetooth)**

User can connect the phone to TCU via Bluetooth. After successful connection Hero App will show status as "Connected" with

- Bluetooth icon. Once connected, user can trigger “Find my vehicle”, it will play three beep.
- **Share location**


When vehicle ignition is turned “ON”, TCU sends live GPS location to server, so that we can share the live location and current location. Sharing live location duration can be configured by 15 minutes, 1 hour and 8 hours.

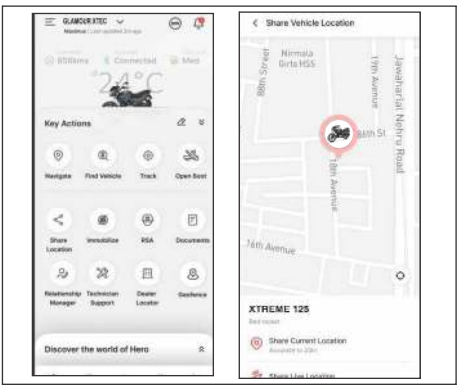

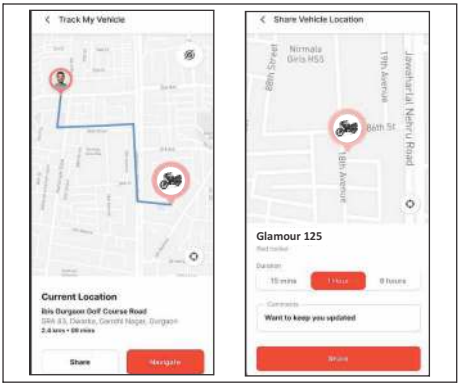

- **Notifications and alerts ON/OFF settings.**

User can set the notification alerts through “notifications settings” in the Hero App as shown below.

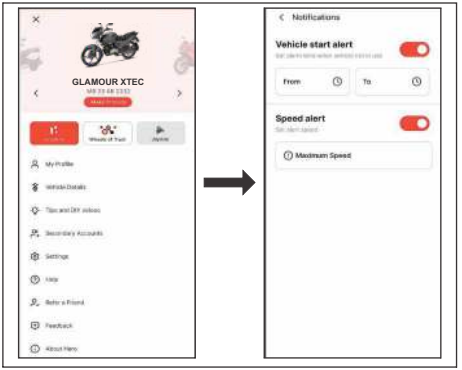

(d) Steering lock

Steering lock with ignition switch, turn the ignition key (1) to "OFF" (⊠) position & turn the handlebar towards left or right & push the key downwards & turn towards "LOCK" position. After locking take out the ignition key.



(1) Ignition key

HANDLEBAR SWITCHES CONTROL

Left handlebar controls

1. Passing switch

Gives an indication for passing ahead.

Press passing lamp switch (1) to operate the passing lamp.



(1) Passing switch
(2) Clutch switch

2. Clutch switch

There is a clutch switch (2) provided for the safety of the rider. The vehicle cannot be started by electric starter switch until the clutch lever is operated when the vehicle is engaged in gear.


3. Headlamp dimmer switch

The headlamp operates only when the engine is running or when passing switch (3) is operated. Select " " for high beam and " " for low beam.

4. Turn signal lamp switch (⇦ ⇨)

Shift the turn signal lamp switch (4) sideways for right/left indications and leave it to come back to its normal position on its own.

IMPORTANT: To switch "OFF" the turn signal after completing the turn, gently push inside.

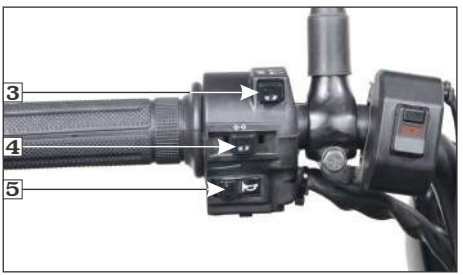

(3) Headlamp dimmer switch
(4) Turn signal lamp switch
(5) Horn switch

5. Horn switch (⇦)

Press the horn switch (5) to operate the horn.

(6) SOS alert/Panic switch

SOS alert or Panic switch (6) is a safety feature which is provided to send a text notification along with the rider's current location to his/her emergency contact person during any incident. In this way, it reduces the emergency response time for the arrival of the responder to the rider's location. SOS alert switch (6) is provided on the right handlebar.

In case of any emergency (For e.g., accident, vehicle toppled, etc.), the user can open the SOS flap (7) and press the SOS alert/panic switch(6) for more than 3 seconds, in ignition "ON" (Ω) condition.



(6) SOS alert/Panic switch
(7) Flap

NOTE

SOS alert initiates only when the vehicle's ignition is "ON" (Ω).

Once the SOS alert switch is pressed, the Hero App will alert the rider's emergency contact saved in application along with the rider's current location.

Before initiating SOS alert, the user should be aware of the following points:

- SOS alert will be activated only when the SOS switch is pressed by the user for more than 3 seconds. Additionally, the buzzer will activate with one beep.

- The SOS alert can be disabled within 10 seconds of the SOS switch press event, if the SOS button is pressed twice within 3 seconds.
- The SOS alert status can be cleared by switching off the ignition of the vehicle.


Right handlebar controls

1. Electric starter switch (⟲)

Ensure starter switch (1) is operated when the vehicle is in neutral gear. If the vehicle is engaged in gear, press the clutch lever before operating the starter switch. Release starter switch after the engine has started.

! CAUTION

- ***If electric starter switch is pressed continuously and engine does not start, cranking of engine will stop after 5 secs. After that rider again needs to press the electric starter switch.***
- ***If engine started, cranking of the engine will stop after r/min reaches more than 800 r/min under normal condition.***

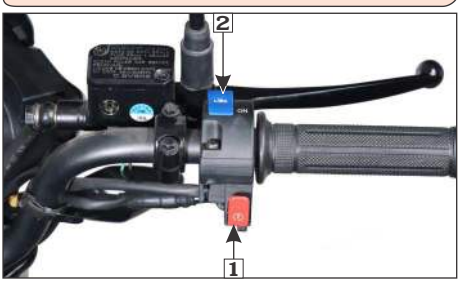

(1) Electric starter switch (2) i3s switch

2. i3s switch

There is an i3s switch (2) provided to enable the rider for turning i3s mode "ON" or "OFF" based on the traffic conditions.

i3s (IDLE STOP START SYSTEM)

Starting & Warm up the engine:

Turn the ignition key to "ON" (⟲) position.


The i3s indicator (1) will glow on the speedometer console for 2 seconds and turn "OFF". For the activation of i3s system, start the engine and let it idle till the engine gets warmed up or temperature reaches more than 75°C.



(1) i3s indicator

Initial activation of the i3s system:

Keep the i3s switch (2) to "ON" position. Turn the ignition key to "ON" position. The i3s indicator on the speedometer console will glow for 2 seconds and turn "OFF".

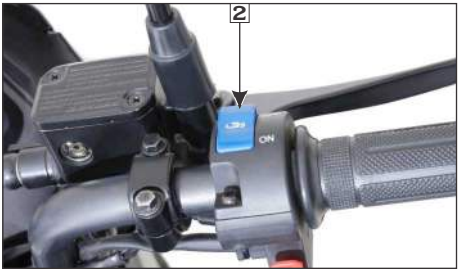

(2) i3s switch

Start the vehicle (in neutral and clutch lever released condition) with less than 2000 r/min and let it idle till engine temperature reaches more than 75°C. The engine will cut-off in 30 seconds. After the first stop start, every subsequent stop will be in 5 seconds.

In this condition, the engine can be restarted either with clutch lever, kick or electric start.

Driving with i3s switch in "ON" position:

While driving, if the engine is kept idling (while waiting in a traffic signal), the engine will cuts-off in 5 seconds. (The vehicle should be in stand still condition, with neutral gear position at less than 2000 r/min with clutch lever/throttle is in released position and engine is warmed up). The i3s indicator will be continuously blinking in the speedometer indicating that vehicle stopped in i3s condition. By pressing the clutch lever, the engine will start again and gear can be engaged to move the vehicle.

NOTE

- ***If vehicle stops in i3s condition and kept idle for more than 500 secs (ignition switch is "ON" position) i3s function will be deactivated and cannot be started by pressing the clutch lever, rider can only start the vehicle with electric or kick start.***
- ***If engine is stopped by any means other than i3s function, i3s indicator will not glow/blink in the speedometer. In this condition, vehicle will not start by pressing the clutch lever. Vehicle can be started by using kick or electric start.***
- ***If all the required i3s conditions are met, i3s indicator will glow for 5 secs before the engine cuts-off.***

Driving with i3s switch in "OFF" position:

While driving in a traffic jam/or very dense traffic where the vehicle has to encounter a stop and go situation, the i3s switch can be changed to "OFF" position. Once this is done, the i3s system will not work and the vehicle will be in normal operating conditions as other vehicles and no special functions will be performed.

NOTE

- ***The i3s system will not function if rider puts the i3s switch to"OFF" position.***
- ***If the battery voltage is low and engine r/min is less than 2000, there will be 3 continuos blinks after every 6 secs.***
- ***If the low battery voltage is detected while the ignition key is in "ON" position or engine is in running condition, the i3s function will be deactivated or may not function properly until the rider turns the ignition switch to "OFF" (⊠) position and then back to "ON" (⏼) position.***
- ***If the vehicle is driven without battery or with the dead battery and the engine r/min is less than 2000. The i3s indicator on the speedometer will blink continuously at every 1.5 secs.***
- ***If the vehicle has fallen down, i3s function may not work properly. Before restarting the engine you must turn the ignition switch to "OFF" (⊠) position and then back to "ON" (⏼) position.***
- ***If the battery is in healthy condition and the i3s system does not work properly, it is recommended to visit your Authorised*** Hero MotoCorp ***workshop.***
- ***i3s system will not function properly if the vehicle battery is low/dead or driven without battery.***
- ***If vehicle diagnoses with any problem in electronic control unit (ECU) the i3s function will not work.***

SIDE STAND INDICATOR/SWITCH

For the safety of the customer a side stand indicator (1) is provided.



(1) Side stand indicator

A side stand switch (2) is provided in the side stand, when the side stand is down (ignition switch "ON" (⏼)), the switch enables the side stand indicator lamp to glow on the speedometer panel.



(2) Side stand switch (3) Side stand spring

- Check the side stand for proper function and the spring (3) for damage or loss of tension and the side stand assembly for free movement.
- Check whether the side stand indicator (1) glows when the side stand is down.
- While the vehicle is removed from side stand, the side stand indicator (1) should not glow.
- If the side stand indicator (1) does not operate as described in above steps, please visit your Authorised Hero MotoCorp workshop.

! CAUTION

Ensure that adequate care should be taken while cleaning the side stand switch.

Your vehicle is equipped with "Side stand engine kill" feature for safety purpose.

This feature has following functions:


- It prevents starting the engine when transmission is in gear (irrespective of clutch lever operation) and side stand is down.
- It stops the running engine when transmission is in gear (irrespective of clutch lever operation) and side stand is moved down.

⚠ WARNING

"Side stand engine kill" system is not affected by clutch lever operation.

To inspect the functionality of this feature, park the vehicle on its main stand and check all the conditions described in the inspection flow diagram:

INSPECTION FLOW DIAGRAM

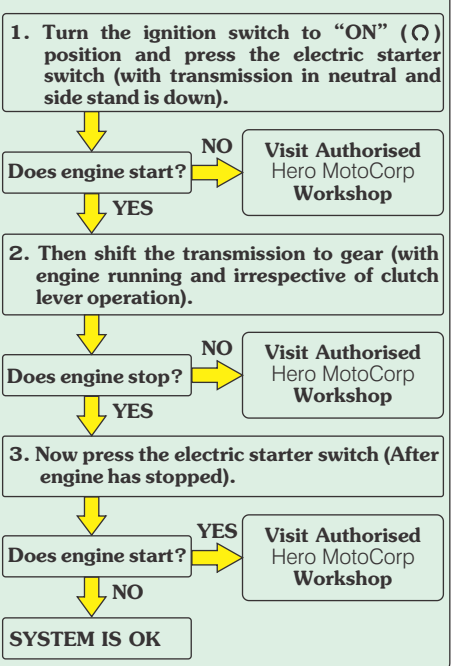

If your vehicle doesn't operate as described in above flow diagram, please visit your Authorised Hero MotoCorp workshop.

⚠ WARNING


Regularly inspect the functionality of "Side stand engine kill" feature and in case of any malfunction visit Authorised Hero MotoCorp ***workshop.***

FUEL


(a) Fuel tank

Fuel tank capacity is 10 litres (Minimum fuel to be maintained above one segment blinking of fuel level indicator).

- To remove the fuel tank cap (1), open the key hole cover (2) and insert the ignition key (3) turn it clockwise and remove the cap.

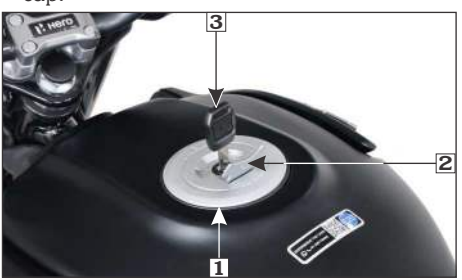

(1) Fuel tank cap **(2) Key hole cover**
(3) Ignition key

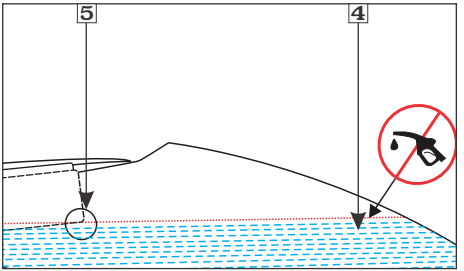

(4) Fuel **(5) Filler neck**

- Do not overfill the tank. There should be no fuel (4) in the filler neck (5).
- For locking, position the cap with "▲" mark facing towards the front, back on the opening and press gently. The key springs back to the normal position and the cap gets locked.

! CAUTION

Do not park the vehicle under direct sunlight as it causes evaporation of petrol due to heat and deterioration of paint gloss due to ultra violet rays.

⚠ WARNING

Petrol is extremely flammable and is explosive under certain conditions. Refill in a well ventilated area with the engine stopped. Do not smoke or allow flames or sparks in the area where the vehicle is refilled or where petrol is stored.

(b) Petrol containing alcohol

Fuel available at your location may contain ethanol. Ethanol is a form of alcohol and is generally mixed with petrol to reduce emissions.

E20 sticker on fuel tank indicates that the vehicle parts are compliant up to the blend of "20% ethanol with petrol".

It is recommended not to use petrol containing more than 20% of ethanol to avoid any damage to engine and other parts of the vehicle.

If you observe any problem related to the operational performance of the vehicle, contact your Authorized Hero MotoCorp workshop.



(1) E20 sticker **(2) Fuel tank**

! CAUTION


Please ensure the vehicle is not used with low fuel indicator glowing continuously. It will not only result in the vehicle running out of fuel, it may also cause serious damage to the fuel pump. Please ensure fuel is filled up as soon as the low fuel indicator starts glowing.

⚠ WARNING

- ***Petrol is highly flammable and explosive. You can be burned or seriously injured when handling fuel.***
- ***Stop the engine and keep heat, sparks and flame away.***
- ***Refuel only outdoors.***
- ***Wipe off spills immediately.***

SEAT LOCK

Location : On the rear left side of the seat, below the rear cowl.

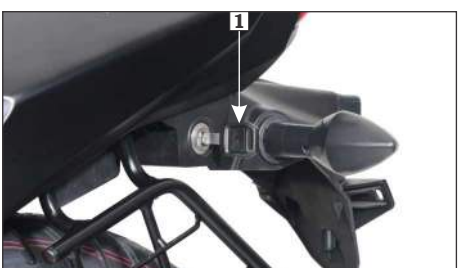

(1) Ignition key

Operation : To unlock the seat, insert the ignition key (1) and turn it clockwise direction. To install, engage the hook on the underside of the seat with the frame and push on the top rear side of the seat until the lock clicks.

HELMET HOLDER

The helmet holder is located below the seat. Remove the seat. Hang the helmet on the helmet holder (1) by using wire helmet set (2) (optional). Install the seat (3) and lock it securely.



(1) Helmet holder hook
(2) Wire helmet set (optional) **(3) Seat**

⚠ WARNING

- ***Riding with a helmet attached to the holder can interfere with the rear wheel and could cause a crash in which you can be seriously hurt or killed.***
- ***Use the helmet holder only while parked. Do not ride with a helmet secured by the holder.***

USB CHARGER

A USB charger (1) with a cap (2) located on the left side of the inner panel (3) near meter console to charge your mobile phone safely while riding.



(1) USB charger
(2) Cap
(3) Inner panel

Use of non-standard USB cable may cause damage to the mobile phones.

To connect a mobile phone to the charger, first open the cap from the USB charger and then plug in the charger cable to it. Hero MotoCorp will not be responsible for damages caused due to use of non-standard USB cable.

CAUTION

- ***Always place the device in a soft clean cloth/towel to avoid any damage due to road shocks while riding.***
- ***Multiple charging of USB devices have to be avoided, simultaneous charging may lead to slow or no charging.***
- ***USB port is for charging compatible USB devices.***
- ***Do not leave the USB device and USB cable in the fuel tank cover when the vehicle is parked.***
- ***Charge your device when the engine is operational/while riding.***
- ***USB charger will not be covered under warranty in case of USB charger cap damage.***

NOTE

- ***Do not apply any soap solution, oil or grease inside the USB charger.***
- ***Any personal belongings have to be removed before water washing to avoid damage.***
- ***Always keep the USB port cap closed after use to prevent dust or water entry during rains/water wash.***
- ***Do not direct water jet towards the port even with cap closed to avoid any short circuit. Always dry the area using a dry cloth or moisture free compressed air before use.***
- ***Press the cap slightly for proper locking of USB charger cap.***
- ***The charging time of mobile may vary, depending on the mobile's battery state of the charge, mobile make and conditions.***

PRE-RIDE INSPECTION

You should conduct pre-ride inspection before riding the vehicle to enhance riding comfort and safety. Clean your vehicle regularly. It protects the surface finish. Avoid cleaning with products that are not specifically designed for vehicle surfaces. Inspect your vehicle very day before you start the engine.

The items listed here will only take a few minutes, and in the long run they can save time, expense and possibly your life. Please follow the tips as given below:

- **Engine oil level-** Check and top up engine oil if required **(page 58).** Check for leaks.
- **Programmed FI malfunction indicator lamp (MIL)-** When the ignition switch is turned "ON" the programmed FI malfunction indicator lamp(MIL) glows continuously and then should go "OFF" once the engine is started.
- **Fuel level-** Ensure sufficient fuel is available in your fuel tank for journey. Fuel level segment should be above one segment blinking **(page 19)**. Check for leaks.
- **Front brake (Disc type)-** Check for correct brake fluid level in the master cylinder **(page 69).**
- **Front and Integrated brakes (Drum type)-** Check operation. Adjust free play if necessary **(page 71).**
- **Rear brake (Disc variant)-** Check for correct brake fluid level in the reservoir **(page 70).**

- **Rear brake (Drum type)-** Check operation. Adjust free play if necessary **(page 72)**.
- **Tyres-** Check condition and pressure **(page 78).**
- **Clutch-** Check for smooth operation. Adjust free play if necessary **(page 65)**.
- **Drive chain-** Check condition and slackness **(page 66).** Adjust and lubricate if necessary.
- **Throttle-** Check for smooth opening and closing in all steering positions **(page 66)**.
- **Lamps and Horn-** Check that headlamp, position lamp, tail/stop lamp, turn signal lamps and horn function properly.
- **Rear view mirror-** Ensure that the rear view mirror gives a good rear view when you are sitting on the vehicle.
- **i3s switch-** Make sure whether the i3s switch is in "ON" or "OFF" position **(page 39).**
- **i3s system-** Make sure that i3s system is functional properly **(page 39).**
- **Fitting & Fasteners-** Check & tighten if necessary.
- **Steering-** Check for smooth action for easy maneuverability.
- **Side stand-** Check for proper functionality **(page 41).**

STARTING THE ENGINE

Always follow the proper starting procedure described below :

- To protect the catalytic converter in your vehicle's exhaust system, avoid extended idling and the use of leaded petrol.
- Your vehicle's exhaust contains poisonous carbon monoxide gas. High levels of carbon monoxide can collect rapidly in enclosed areas such as garage. Do not run the engine with the garage door closed.


! CAUTION

- ***If electric starter switch is pressed continuously and engine does not start, cranking of engine will stop after 5 secs. After that rider again needs to press the electric starter switch.***
- ***If engine started, cranking of the engine will stop after r/min reaches more than 800 r/min under normal condition.***
- ***This vehicle is equipped with a side stand engine kill feature (page 42).***

Preparation

Before starting insert the key and follow the below mentioned procedure :

- Turn the ignition switch (1) to "ON" (Ω).
- Confirm that the malfunction indicator lamp (MIL) (2) glows continuously and then should go "OFF" once the engine is started.

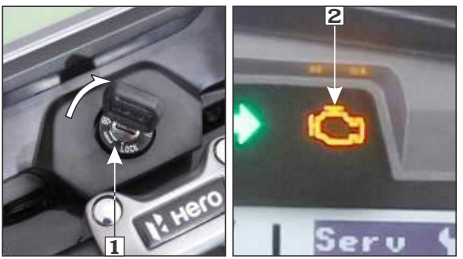


(1) Ignition switch
(2) Malfunction indicator lamp (MIL)

NOTE


If MIL remains "ON" even if the vehicle is started, there is an abnormality in the programmed FI system. It is recommended to reduce the speed and drive to the Authorised Hero MotoCorp ***workshop for check-up.***

- Find neutral position & check neutral Ⓝ indicator (3) on instrument console with ignition "ON".

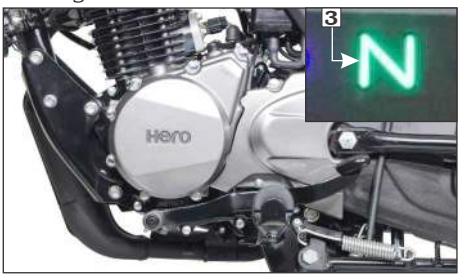

(3) Neutral indicator

- Make sure whether the i3s switch (4) is in "ON" or "OFF" position.

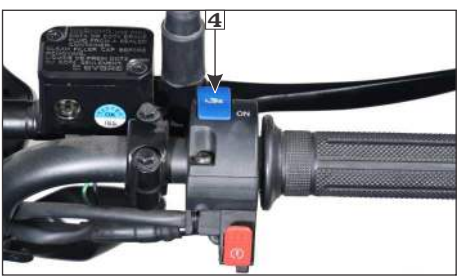

(4) i3s switch

- **Electric start :** Press the electric starter switch with fully closed throttle.
- **Kick start :** Depress the kick starter until resistance is felt. Then let the kick starter return to the top of its stroke. Kick from the top of the stroke through to the bottom with a rapid, continuous motion.

Starting procedure

At any ambient temperature, Press the starter switch with the throttle completely closed.

NOTE

This vehicle has a fuel-injected engine with an idle air control valve (IACV).

Flooded engine

If the engine fails to start after repeated attempts, it may be flooded with excess fuel.

- If the engine does not start wait for 15-20 seconds, and try restarting the engine with throttle completely closed.
- If the engine starts with unstable idle, open the throttle slightly.

Ignition cut off

Your vehicle is designed to automatically stop the engine & fuel pump, if vehicle falls down.

(Bank angle sensor cuts off the ignition).

NOTE

If the vehicle has fallen down, before restarting the engine you must turn the ignition switch to "OFF" (⊗) position and then back to "ON" (○) position.

Running in

Help assure your vehicle's future reliability and performance by paying extra attention to how you ride during the first 500 km.

During this period, avoid full-throttle starts and rapid acceleration.

NOTE

- ***To start the engine if any gear is engaged, press the clutch lever and press the starter switch.***
- ***Do not open the throttle during starting the vehicle.***

WARNING

Never run the engine in a closed area, the exhaust contains poisonous gases.

RIDING

- After the engine has been warmed up, the vehicle is ready for riding.
- While the engine is idling, press the clutch lever and depress the gearshift pedal downwards using the toe to shift into 1st gear.
- Slowly release the clutch lever and at the same time, gradually increase engine speed by opening the throttle. Coordination of the throttle and clutch lever will assure a smooth positive start.
- When the vehicle attains a moderate speed, close the throttle, press the clutch lever and shift to 2nd gear by depressing the gearshift pedal.

- The sequence is repeated progressively to shift 3rd, 4th and 5th (top gear).



Recommended max. operating speed in each gear.

1st : 0-15 km/hr
2nd : 10-25 km/hr
3rd : 20-40 km/hr
4th : 25-50 km/hr
5th : 40 km/hr and above

! CAUTION

Do not shift gears without operation of clutch and without closing the throttle otherwise this would lead to damage of gears.

BRAKING

- For normal braking, close the throttle and gradually apply both front and rear brakes simultaneously while shifting down gears to suit your road speed.
- For maximum deceleration/quick stopping, close the throttle and apply the front and rear brakes simultaneously.

For integrated braking system (IBS)

To stop the vehicle, press the rear brake pedal for the application of front and rear brakes simultaneously. However, for more effective braking, it is advised to apply front and rear brake simultaneously, keeping the throttle in closed position.

⚠ WARNING

- ***When riding in wet or rainy conditions, or on loose surfaces, apply front brake carefully after applying rear brake to avoid wheel slip.***
- ***Extreme braking may cause wheel locking and reduce control over the vehicle.***
- ***Wherever possible, reduce speed or apply brake before entering a turn, closing the throttle or braking in mid turn may cause wheel slip. Wheel slip will reduce control over the vehicle.***
- ***When riding in wet or rainy conditions, or on loose surfaces the ability to stop the vehicle reduces.***
- ***All your actions should be smooth under these conditions. Sudden acceleration, braking or turning may cause loss of control. For your safety, exercise extreme caution when braking, accelerating or turning.***
- ***When descending a long steep slope use engine braking (power) by changing to lower gears, with intermittent use of both brakes. Continuous brake application can overheat the brakes and reduce their effectiveness.***

PARKING

After stopping the vehicle, shift the transmission to neutral, turn the ignition switch "OFF" (⊗), park the vehicle on main stand, lock the steering and remove the key.

! CAUTION

- ***Park the vehicle on firm level ground to prevent overturning.***
- ***While parking vehicle on side stand engage the first gear.***

TOOL KIT/FIRST AID KIT

The tool kit (1) is located below the seat in the rear. Some emergency repairs, minor adjustments and parts replacement can be performed with the tools contained in the kit.

Kit consists of following tool:

- Tool bag–1 No.
- +, – No. 2 Driver–1 No.
- Grip–1 No.
- Box wrench 16x14–1 No.
- Pin spanner–1 No.

The first aid kit (2) is located below the seat in the rear. For some emergency first aid can be performed by medicine contained in the kit.

Kit contains the following items:

- Antiseptic cream–1 No.
- Sterilised dressing–1 No.
- Water proof plaster–1 No.
- Elastic bandage–1 No.
- Gauze (Rolled bandage)–1 No.
- Sterilised elastic plaster–1 No.
- First aid bag–1 No.
- Hemostatic agent–1 No.



(1) Tool kit **(2) First aid kit**

CLEANING AND WASHING OF VEHICLE

Follow the below mentioned steps for washing the vehicle.

- Wet the vehicle with light water spray. Avoid directing water meter console, muffler outlets and electrical parts.
- Clean the headlamp lens and other plastic parts using a cloth or sponge dampened with a solution of mild detergent and water.
- Rub the soiled area gently rinsing it frequently with fresh water.
- After cleaning spray water thoroughly.
- Dry the vehicle by wiping with dry soft cloth.

NOTE

- ***Our authorised dealership take all above mentioned precautions like recommended detergents and usage of muffler caps/plugs during wash to ensure quality wash.***
- ***Do not use high pressure water (or air). It can damage certain parts of the vehicle.***

MAINTENANCE

Importance of maintenance

A well-maintained vehicle is essential for safe economical and trouble-free riding. It will also help reduce pollution.

To help you, take proper care of your vehicle, the following pages include a maintenance schedule and a maintenance record for regular scheduled maintenance.

These instructions are based on the assumption that the vehicle will be used exclusively for its designed purpose.

Sustained high speed operation or operation in unusually wet or dusty conditions will require more frequent service than specified in the maintenance schedule.

Consult your Authorised Hero MotoCorp Dealer for recommendation applicable to your individual needs and use.

If your vehicle overturns or is involved in a crash, be sure that you visit your Authorised Hero MotoCorp workshop for detailed inspections.

WARNING

- ***Improperly maintaining this vehicle or failing to correct a problem before you ride can cause a crash in which you can be seriously hurt or killed.***
- ***Always follow the inspection and maintenance recommendations and schedules in this owner's manual.***

Maintenance safety

This section includes instructions on some important maintenance tasks. You can perform some of these tasks with the tools provided (if you have basic mechanical skills).

Other tasks that are more difficult and require special tools are best performed by professionals. It is recommended that wheel removal should normally be handled by a Hero MotoCorp authorised workshop.

You will come across some of the most important safety precautions in the following pages of this manual.

However, we cannot warn you of every conceivable hazard that can arise in performing maintenance. Only you can decide whether or not you should perform a given task.

WARNING

- ***Failure to follow maintenance instructions and precautions properly can seriously injure you.***
- ***Always follow the procedures and precautions in this owner's manual.***

SAFETY PRECAUTIONS

- Make sure the engine is "OFF" before you begin any maintenance or repair. This will help to eliminate several potential hazards:
  - **Carbon monoxide poisoning from engine exhaust.**
    Be sure there is adequate ventilation whenever you operate the engine.
  - **Burns from hot parts.**
    Let the engine and exhaust system cool before touching.
  - **Injury from moving parts.**
    Do not run the engine unless instructed to do so.
- Read the instruction before you begin and make sure you have the tools and skills required.
- To help prevent the vehicle from falling over, park it on a firm, level surface on the main stand.
- To reduce the possibility of a fire or explosion, be careful when working around petrol or batteries. Use only nonflammable solvent, not petrol, to clean parts. Keep cigarettes, sparks and flames away from the battery and all fuel–related parts.

Remember that your Authorised Hero MotoCorp workshop knows your vehicle best and is fully equipped to maintain and repair it.

To ensure best quality and reliability, it is recommended to use Hero MotoCorp genuine parts for repair and replacement.

MAINTENANCE SCHEDULE

Perform the pre-ride inspection **(page 46)** at each scheduled maintenance period.

I: INSPECT C: CLEAN R: REPLACE A: ADJUST L:LUBRICATE T: TOP UP E: EMISSION CHECK

The following maintenance schedule specifies all maintenance required to keep your vehicle in peak operating condition. Maintenance work should be performed in accordance with standards and specifications of Hero MotoCorp by properly trained and equipped technicians. Your Authorised Hero MotoCorp workshop meets all of these requirements.

Ensure that each paid service is availed within 90 days or 3000 km from the date of previous service, whichever is earlier.

To be serviced by your Authorised Hero MotoCorp workshop unless the owner has the relevant tools, technical information and is technically qualified.

In the interest of safety, we recommend that these jobs are carried out only by your Authorised Hero MotoCorp workshop.

Note-1 : At higher odometer readings, repeat the frequency interval established here.

Note-2 : Replace air cleaner element once in every 15000 km or early replacement may be required when riding in dusty areas.

Note-3 : Replace engine oil once in every 6000 km. Top up once in every 3000 km.

Note-4 : Visit Authorised Hero MotoCorp workshop for inspection, cleaning, lubrication and adjustment of drive chain at every 2000 km.

Note-5 : Replace brake fluid once in a every 2 years or 30000 km, whichever is earlier.

Note-6 : Inspect & maintain specified torque.

Note-7 : Inspect the bearings free play, replace if necessary.

Note-8 : Replace front fork oil once in a every 2 years or 30000 km, whichever is earlier.

Note-9 : Inspect for any play in the rear suspension mounting bushes, replace if necessary.

Note-10 : Check CO emission at idle.

Note-11 : Inspect the canister hoses for deterioration, damage or loose connections and canister for cracks or other damages.

Note:

- Always wipe the water from the vehicle after washing. Use clean soft cloth or pressurized air for completely drying the water.
- Always replace gaskets, O-rings, circlips and cotter pins with new one once removed.

Replacement of parts (e.g filters, etc.) and consumables (e.g engine oil, etc.) during paid or free service are at customer's expenses.

Give a missed call to
+91 8367796950

or Scan QR code

MAINTENANCE SCHEDULE

Dear Customer,

We would strongly recommend the following schedule, to keep your vehicle in perfect running condition and healthy environment. Vehicle subjected to severe use or ridden in dusty area will require more frequent servicing.

	ITEMS	WHICHEVER COMES FIRST	#DURING FREE SERVICE PERIOD					AFTER FREE SERVICE ONCE IN EVERY				
		SERVICE	1st	2nd	3rd	4th	5th					
		DAYS	1st 60	Next 100	Next 100	Next 100	Next 100					
		KM Note-1	500-750	3000-3500	6000-6500	9000-9500	12000-12500	3000	6000	9000	12000	15000
	Fuel Line		I	I	I	I	I	I				
	Throttle Operation		I, A	I, A	I, A	I, A	I, A	I, A				
	Air Cleaner Element	Note-2	Do not open air cleaner element unless there is a drivability problem									R
	Spark Plug		I, C, A	I, C, A	I, C, A	I, C, A	R	I, C, A			R	
	Valve Clearance		I, A	I, A	I, A	I, A	I, A	I, A				
	Engine Oil	Note-3	R	I, T	R	I, T	R	I, T	R			
	Engine Oil Strainer Screen		C				C				C	
	Engine Oil Filter		I		I		R		I		R	
	Electric Starter		I	I	I	I	I	I				
	Oil Circulation		I	I	I	I	I	I				
	Drive Chain	Note-4	I,C,L,A at every 2000 km					I,C,L,A at every 2000 km				
	Drive Chain Slider			I	I	I	I	I				
	Battery Voltage		I	I	I	I	I	I				
	Brake Shoe		I, A	I, A	I, A	I, A	I, A	I, A				

	ITEMS	WHICHEVER COMES FIRST	#DURING FREE SERVICE PERIOD					AFTER FREE SERVICE ONCE IN EVERY				
		SERVICE	1st	2nd	3rd	4th	5th					
		DAYS	1st 60	Next 100	Next 100	Next 100	Next 100					
		KM Note-1	500-750	3000-3500	6000-6500	9000-9500	12000-12500	3000	6000	9000	12000	15000
	Brake Pad Wear		I	I	I	I	I	I				
	Brake Fluid	Note-5	I, T	I, T	I, T	I, T	I, T	I, T				
	Brake System (Brake Cam & Brake Pedal)			C, L		C, L			C, L			
	Stop Lamp Switch		I, A	I, A	I, A	I, A	I, A	I, A				
	Headlamp Focus		I, A	I, A	I, A	I, A	I, A	I, A				
	Clutch Lever Free Play		I, A	I, A	I, A	I, A	I, A	I, A				
	Side Stand Pivot Bolt		C, L	C, L	C, L	C, L	C, L	C, L				
	Rear Brake Pedal/ Main Stand Pivot		C, L	C, L	C, L	C, L	C, L	C, L				
	Side Stand Switch		I, C	I, C	I, C	I, C	I, C	I, C				
	i3s System		I	I	I	I	I	I				
	Nut, Bolts & Fasteners	Note-6	I	I	I	I	I	I				
	Wheel Bearings	Note-7	I	I	I	I	I	I				
	Wheels/Tyres		I	I	I	I	I	I				
	Steering Head Bearing		I	I, A	I	I, A	I, L, A	I	I, A		I, L, A	
	Front Suspension/Oil	Note-8	I	I	I	I	I	I				
	Rear Suspension	Note-9	I	I	I	I	I	I				
	Muffler (Catalytic Converter)	Note-10			I, E		I, E		I, E			
	Evaporative Emission Control System	Note-11	I	I	I	I	I	I				


SPARK PLUG INSPECTION

Recommended spark plugs:

NGK-CPR6 7EA9, RG8YC (Federal Mogul)


For most riding conditions this spark plug heat range number is satisfactory. However, if the vehicle is going to be operated for extended periods at high speeds or near maximum power in hot climates, the spark plug should be changed to a cold heat range number, consult Authorised Hero MotoCorp workshop on this if required.

- Clean any dirt around the spark plug base.
- Disconnect the noise suppressor cap (1) and remove the spark plug (2) with the help of spark plug box wrench provided in the tool bag.

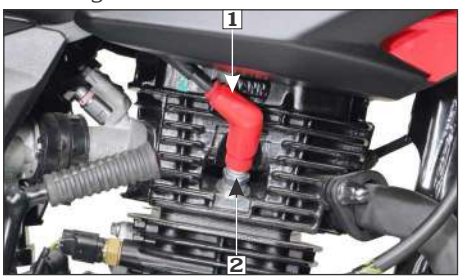

(1) Noise suppressor cap (2) Spark plug

- Visually inspect the spark plug electrodes for wear. The center electrode should have square edges and the side electrode should not be eroded. Discard the spark plug if there is apparent wear or if the insulator is cracked or chipped.

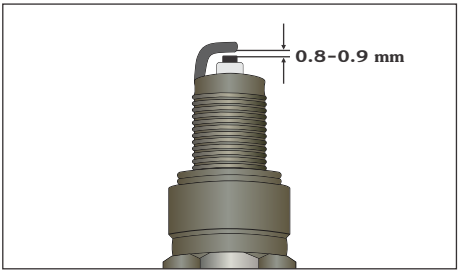

- Make sure that the spark plug gap is **0.8-0.9 mm** using a wire-type feeler gauge. If adjustment is necessary, bend the side electrode carefully. Make sure the plug washer is in good conditions.
- With the plug washer attached, thread the spark plug in by hand to prevent cross-threading.
- Tighten a new spark plug 1/2 turn with spark plug wrench to compress the washer. If you are reusing a plug, it should only take 1/8-1/4 turn after the plug seats.

! CAUTION

- ***Do not remove the spark plug and test for spark on the vehicle by cranking the engine as this could lead to fire or explosion***
- ***Install a dummy spark plug in the cylinder head and test for spark.***
- ***Never use a spark plug with improper heat range.***
- ***Always use resistor type spark plug.***

ENGINE OIL

Use hero genuine engine oil or recommended grade oil.

BRAND: Hero 4T plus

GRADE: SAE 10W 30 SL Grade (JASO MA2).


Manufactured by:

- Tide Water Oil Co. (India) Ltd.
- Savita Oil Technologies Limited.
- Bharat Petroleum Corporation Limited.

OIL CAPACITY: 0.95 litre (disassembly)
: 0.75 litre (at oil change)

Engine oil level inspection/Top up process

Check engine oil level each day before operating the vehicle. The oil level dipstick (1) is on the right crankcase cover for measuring oil level. Oil level must be maintained between the upper (2) and lower (3) level marks on the oil level dipstick.

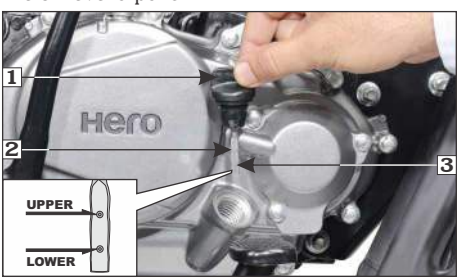

(1) Oil level dipstick (2) Upper level mark
(3) Lower level mark

Do top up if oil level reaches towards the lower level mark or every 3000 km whichever is earlier.

- Park the vehicle on its main stand.
- Start the engine & let it idle for 3-5 minutes.
- Slightly loosen the engine oil check bolt (4) and check the engine oil entry into the cylinder head.



(4) Engine oil check bolt


- After checking the oil circulation, tighten the engine oil check bolt.
- Stop the engine and wait for 2-3 minutes.
- Remove the oil level dipstick, wipe it clean and insert without screwing it in.
- Remove the oil level dipstick and check the oil level.
- If required, add the specified oil up to the upper level mark. Do not overfill.

- Reinstall the oil level dipstick and check for oil leaks.

Engine oil replacement process/ Oil circulation inspection

Drain engine oil with the engine warm and the vehicle on its main stand.

- To drain the oil, remove the oil level dipstick **(page 58)** and drain bolt (1) with sealing washer (2).
- After the oil has completely drained, reinstall the drain bolt with a new sealing washer.

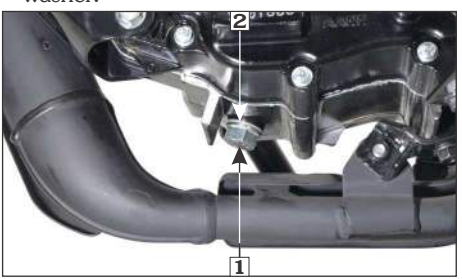

(1) Drain bolt **(2) Sealing washer**

- Fill the crankcase through the oil filler hole with 0.75 litre (approximately) of the recommended grade oil.
- Reinstall the oil level dipstick with a new O-ring.
- Start the engine and allow it to idle for few minutes.
- Stop the engine, let the engine oil settle down and recheck the oil level.
- Make sure that oil level is at the "UPPER" level mark of the oil level dipstick with the vehicle in an upright position and that there are no oil leaks.

! CAUTION


- ***Running the engine with insufficient oil can cause serious engine damage.***
- ***Running the engine with excessive oil can cause spark plug fouling & loss in performance.***
- ***Engine oil is a major factor affecting the performance and service life of the engine. Non-detergent, vegetable or castor based racing oils are not recommended.***

ENGINE OIL FILTER ELEMENT

NOTE


Drain the engine oil thoroughly (page 59) in case of engine oil filter element replacement.

- Remove the three mounting bolts (1).
- Remove the engine oil filter element cover (2) with O-ring (3).

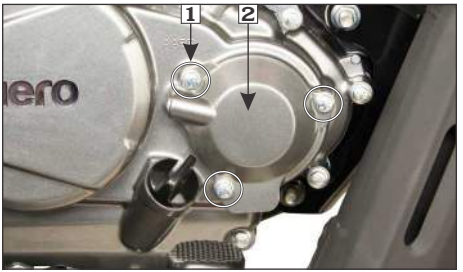


(1) Mounting bolts
(2) Engine oil filter element cover

- Remove the engine oil filter element (4) from the cover.

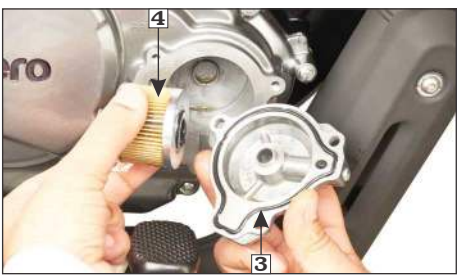

(3) O-ring **(4) Engine oil filter element**

- Replace the engine oil filter element (4).

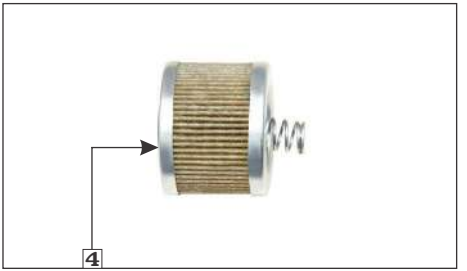

(4) Engine oil filter element


NOTE

- ***When the engine oil filter element replaced always replace the O-ring with the new one.***
- ***Make sure that O-ring is properly seated.***
- ***Apply engine oil on engine oil filter element before installation.***
- ***Inspect and replace engine oil filter element as specified in the maintenance schedule.***

- Installation is in the reverse order of removal.


OIL FILTER SCREEN

- Drain the engine oil thoroughly **(page 59)**.
- Remove the side stand switch screw (1).
- Disconnect the clutch cable (2).
- Remove the exhaust muffler (3), rider footrest assembly with side stand (4), kick starter pedal (5) and right crankcase cover (6).

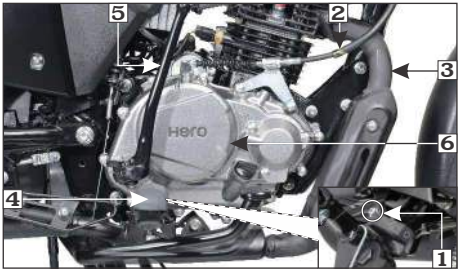

(1) Side stand switch screw
(2) Clutch cable (3) Exhaust muffler
(4) Rider footrest assembly with side stand
(5) Kick starter pedal (6) Right crankcase cover

- Remove the gasket (7) and dowel pins (8).
- Remove the oil filter screen (9) and wash it in clean non flammable or high flash point solvent (kerosene).

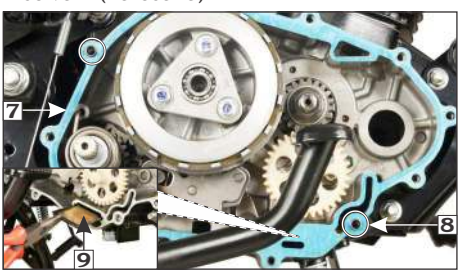

(7) Gasket (8) Dowel pins
(9) Oil filter screen

- Reinstall the oil filter screen with the sharp edged side facing inwards.
- Reinstall the dowel pins, new gasket, crankcase cover, kick starter pedal, rider footrest assembly with side stand, exhaust muffler and clutch cable.
- Install the side stand switch screw.
- Adjust the clutch cable free play, if required **(page 65)**.
- Fill the crankcase with clean engine oil as per specification.

NOTE

Ensure to replace gasket with new one once removed.

AIR CLEANER

Air cleaner element inspection


The air cleaner is viscous paper pleated type filter which has enhances filtering efficiency. The air cleaner should be replaced at regular intervals **(page 54).** When riding in dusty areas, more frequent replacement may be necessary.

- Remove the seat **(page 45).**
- Remove the air cleaner cover screws (1) and the cover (2).




(1) Air cleaner cover screws (2) Cover

- Remove the air cleaner element (3).

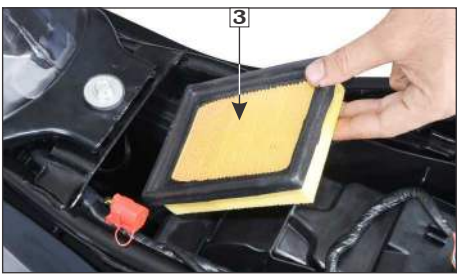

(3) Air cleaner element

CAUTION

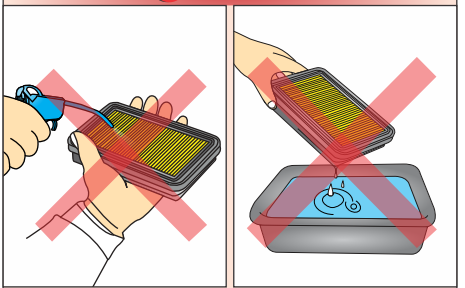

- ***Never wash or clean the viscous filter. Replace filter element once in every 18000 km.***
- ***Replace it earlier if the air cleaner:***
  - ***Becomes very dirty.***
  - ***Gets damaged on the surface.***
  - ***Sealing area gets damaged.***

NOTE

Align the tabs of air cleaner cover before installing screws & the cover.

- Clean the air cleaner housing using a shop towel.
- Install the new air cleaner element.
- Install the air cleaner element cover.
- Install the seat **(page 45)**.

Air cleaner drain tube plug cleaning

Remove the drain tube (1) and drain the deposit into a container.

Follow the above process more frequently when riding in rain or at full throttle.



(1) Drain tube


VALVE CLEARANCE ADJUSTMENT

Excessive valve clearance will cause noise, and little or no clearance will prevent the valve from closing and cause valve damage and power loss. Check valve clearance at the specified intervals **(page 54).**

NOTE

The checking or adjusting of valve clearance should be performed while the engine is cold. The clearance will change as the engine temperature rises.

- Remove the fuel tank.
- Remove the cylinder head left side cover (1) with its gasket (2) by removing bolts (3).

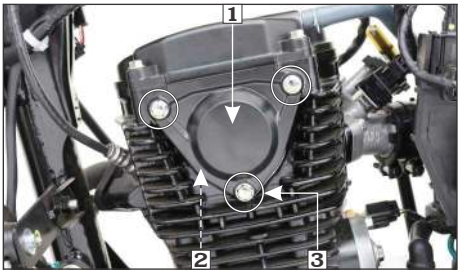


(1) Cylinder head left side cover
(2) Cylinder head left side cover gasket
(3) Cylinder head left side cover bolts

- Remove the engine breather pipe (4) by removing the clip (5).
- Remove the cylinder head cover (6) with its gasket (7) by removing the cylinder head cover bolts (8).




(4) Engine breather pipe (5) Clip
(6) Cylinder head cover (7) Gasket (8) Bolts

- Remove the timing hole cap with O-ring (9). Rotate the cam sprocket (12) clockwise using the special tool (13) until the 'T' mark (10) on the flywheel coincides with the index mark (11) on the left crankcase cover. In this position, the piston will either be on the compression or exhaust stroke.

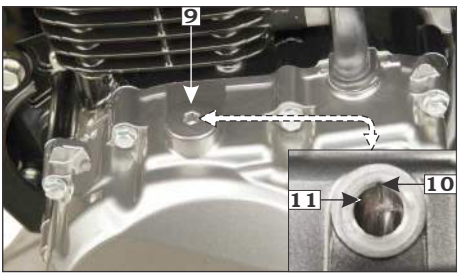

(9) Timing hole cap **(10) 'T' mark**
(11) Index mark

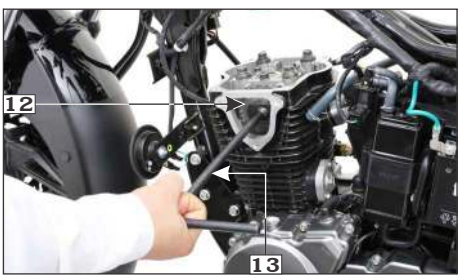

(12) Cam sprocket **(13) Special tool**


The adjustment must be made when the piston is at top dead center and both the inlet and exhaust valves are closed.
This condition can be determined by moving the rocker arms. If they are free, it is an indication that the valves are closed and the piston is in compression stroke. If they are tight, the valves are open, rotate the cam sprocket 360° clockwise and realign the 'T' mark with the index mark.

- Check the clearance by inserting the feeler gauge (14) between the adjusting screw (15) and valve stem (16).

Standard clearance (cold condition)
Intake : 0.08 mm
Exhaust : 0.12 mm

NOTE

Before inserting the feeler gauge, smear a bit of engine oil on the feeler gauge to avoid damage to the feeler gauge.

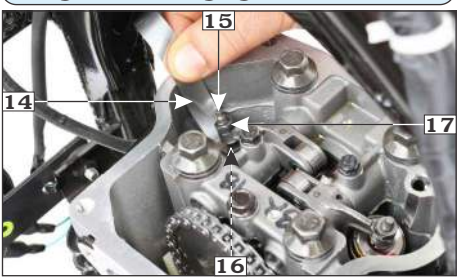

(14) Feeler gauge **(15) Adjusting screw**
(16) Valve stem **(17) Lock nut**

- Adjust by loosening the lock nut (17) and turning the adjusting screw until there is a slight drag on the feeler gauge.
- After tightening the lock nut, check again the clearance.
- Install all parts in the reverse order of disassembly.

NOTE

All O-rings and gaskets to be replaced with new ones.

CLUTCH LEVER FREE PLAY

Adjustment


Clutch adjustment may be required if the vehicle stalls when shifting into gear or tends to creep or if the clutch slips, causing acceleration to lag behind engine speed.

Normal clutch lever free play (1) is 10-20 mm at the lever (2).



(1) Free play: 10-20 mm (2) Clutch lever

- To adjust the free play, loosen the lock nut (3). Turn the adjusting nut (4) to obtain the specified free play. Tighten the lock nut and check the adjustment.

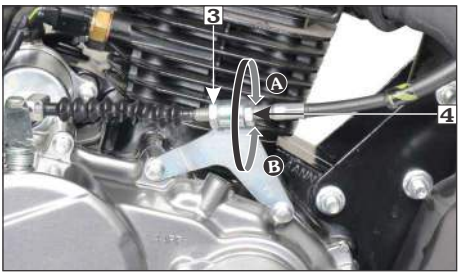

(3) Lock nut (4) Clutch cable adjusting nut
(A) Decrease free play (B) Increase free play

- Start the engine, press the clutch lever and shift into gear. Make sure the engine does not stall, and vehicle does not creep. Gradually release the clutch lever and open the throttle. The vehicle should start smoothly and accelerate.

Other checks

- Check the clutch cable for kinks or signs of wear that could cause sticking or failure.
- Check for clutch cable model. Use genuine clutch cables.
- Check for clutch cable routing.

NOTE

If proper adjustment cannot be obtained or the clutch does not work correctly, visit your Authorised Hero MotoCorp ***workshop.***

THROTTLE OPERATION

Cable inspection


Check for smooth rotation of the throttle grip from the fully open to the fully closed position. Check at full left and full right steering positions. Inspect the condition of the throttle cable from the throttle grip down to the throttle body. If the cable is kinked, chafed or improperly routed, it should be replaced or rerouted. Standard throttle grip free play (1) is approximately 2-6 mm of grip rotation.



(1) Free play: 2-6 mm

Free play adjustment

Slide the boot (2), loosen the lock nut (3) and turn the adjuster (4).

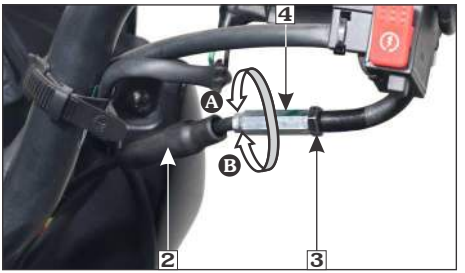

(2) Boot (3) Lock nut (4) Adjuster
(A) Decrease free play (B) Increase free play

DRIVE CHAIN SLACKNESS

The service life of the drive chain depends upon proper lubrication and adjustment.

Poor maintenance can cause premature wear or damage to the drive chain and sprockets.

The drive chain (1) should be checked and lubricated as part of the pre-ride inspection **(page 46).** Under severe usage, or when the vehicle is ridden in unusually dusty areas. more frequent maintenance will be necessary.

Inspection

- Turn the engine "OFF", park the vehicle on its main stand and shift the transmission to neutral. Remove hole cap (2).
- Drive chain slack (3) should be adjusted to allow approximately 30 mm vertical movement by hand.




(1) Drive chain (2) Hole cap
(3) Drive chain slack: 30 mm


Rotate the wheel and check drive chain slack as the wheel rotates. Drive chain slack should remain constant as the wheel rotates.

If the chain is slack in one section and tight in another, some links are kinked and binding. Binding can be eliminated by frequent lubrication.

- Turn the chain to view chain lock plate (4) inside the hole. Ensure that the chain lock plate open end (5) is installed in the opposite direction of the chain rotation.
- Inspect the sprocket teeth for wear or damage.
- If the drive chain or sprockets are excessively worn or damaged, they should be replaced. Never use a new chain with worn out sprockets since this will result in rapid chain wear.

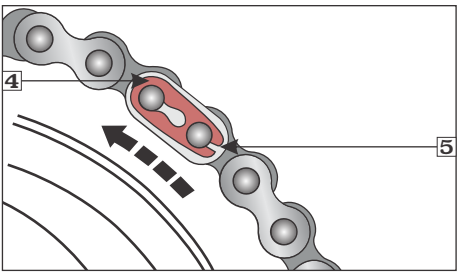


(4) Chain lock plate (5) Open end

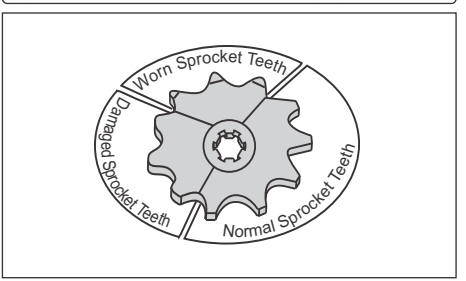


Adjustment

- Park the vehicle on its main stand with the transmission in neutral and the ignition switch in "OFF" (⊠) position.
- Loosen the rear axle nut (1) and sleeve nut (2). Loosen both the drive chain lock nuts (3).
- Turn both the adjusting nuts (4) in an equal number of turns until the correct drive chain slack is obtained. Turn the adjusting nut clockwise to decrease the slack or anticlockwise to increase the slack of the chain.

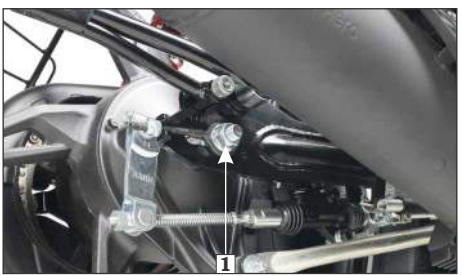

(1) Rear axle nut

- Align the chain adjuster index mark (5) with the corresponding scale graduations (6) on both the sides of the swing arm equally.

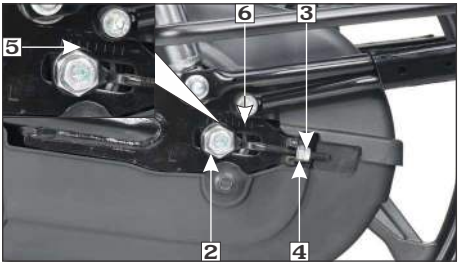

(2) Sleeve nut (3) Drive chain lock nut
(4) Drive chain adjusting nut (5) Index mark
(6) Scale graduation

- If the drive chain slack is excessive when the rear axle is moved to the farthest limit of adjustment, the drive chain is worn and must be replaced. Tighten the rear axle nut and sleeve nut.
  - **Rear axle nut torque: 5.2 kgf-m**
  - **Sleeve nut torque: 4.2 kgf-m**
- Check the drive chain slack again.
- Rear brake pedal free play and stop lamp switch free play are affected when repositioning the rear wheel to adjust drive chain slack. Check rear brake pedal free play and adjust as necessary **(page 72)**.

Lubrication

- Turn the engine "OFF", park the vehicle on its main stand and shift the transmission into neutral.

- Lubricate the drive chain by applying liberal amount of SAE#90 oil.

! CAUTION

Regular adjustment and lubrication as per the maintenance schedule would ensure high performance and longer life.


NOTE

Visit Authorised Hero MotoCorp ***workshop for inspection, cleaning, lubrication and adjustment of drive chain at every 2000 km.***

DRIVE CHAIN SLIDER INSPECTION

(Refer to "Maintenance Schedule" on **(page 54)**.

Check the drive chain slider (1) for wear, the chain slider must be replaced if it is worn to the bottom of the cutout or wear limit (2) is reached. For replacement, visit your Authorised Hero MotoCorp workshop.

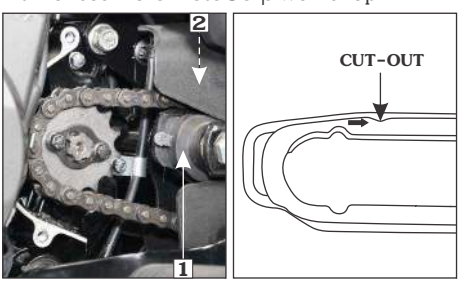

(1) Drive chain slider **(2) Wear limit**

BRAKES

Brakes (Integrated braking system)

Brakes are items of personal safety and should always be maintained with proper adjustments. When one applies the Integrated/Rear brake pedal, front & rear brakes activate jointly.


(a) Front brake inspection (Disc type)

Master Cylinder/Reservoir.


Location: Right handlebar.

Brake fluid recommended: DoT 3 or DoT 4

Fluid level–Ensure that the brake fluid level does not fall below "MIN" mark (1) on the master cylinder, when checked with the master cylinder parallel to the ground. The level decreases gradually due to piston movement to compensate pad wear. If the level decreases abruptly, check for leakage in the brake system and contact your Authorised Hero MoroCorp workshop.

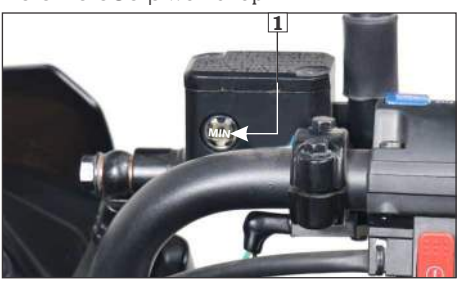

(1) "MIN" mark

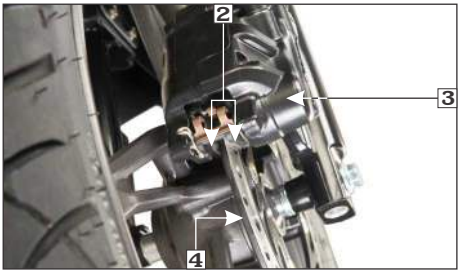

(2) Brake pads (3) Caliper (4) Disc

NOTE

- ***Clean the dirt and mud accumulation between the brake pads (2), caliper (3) and the disc (4) by using a water jet.***
- ***Always contact your Authorised*** Hero MoroCorp ***workshop for refilling of master cylinder when necessary. Do not mix DoT 3 and DoT 4 brake fluid.***

(b) Rear brake fluid (Disc variant)

Refer to the safety precautions on **(page 53).**


Reservoir (1)

Location : Near the right side pillion footrest.

Brake fluid recommended :

DoT-4/DoT-3.

Fluid level – Ensure that the brake fluid level does not fall below "MIN" mark (2) on the reservoir parallel to the ground. The level decreases gradually due to piston movement to compensate pad wear. If the level decreases abruptly, check for the leakages in the brake system and consult your Authorised Hero MoroCorp workshop.

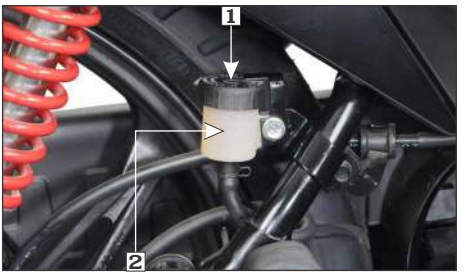


(1) Reservoir (2) "MIN" mark

(c) Brake pad wear (Disc variant)

Brake pad wear depends upon the severity of usage, the type of riding & road conditions. Generally, the pads will wear faster on wet & dirty roads. Inspect the pads at each regular maintenance interval.

Inspection

- Check the wear indicator grooves (1) on each pad.
- Check the brake pads for wear by examining the wear limit grooves on each pad.
- Replace the pads if worn out to the bottom of the groove.
- Always replace both the pads as a set.
- Visit your Authorised Hero MoroCorp workshop for the brake pad replacement.

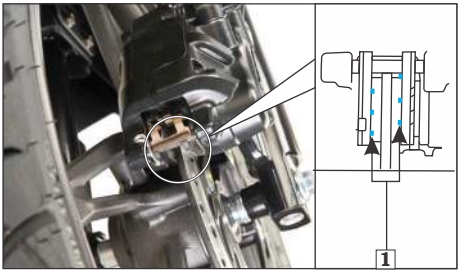


(1) Wear indicator groove

⚠ WARNING


Always apply front and rear brakes simultaneously to avoid skidding of vehicle.

(d) Front brake inspection (Drum variant)

The distance, the front brake lever (1) and integrated brake pedal (2) moves before each brake starts to engage is called free play (3).

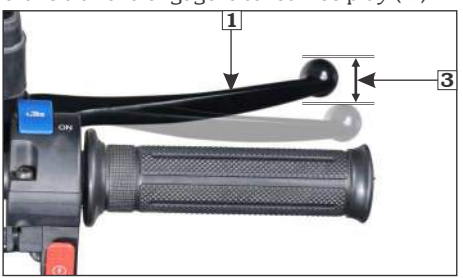


(1) Front brake lever
(3) Free play: 10-20 mm

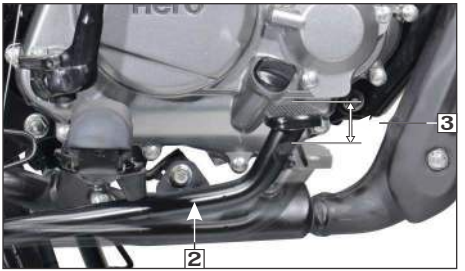

(2) Integrated/Rear brake pedal
(3) Free play: 20-30 mm

Front brake cable (A) on "F" side Adjustment

- Push the integrated brake arm (4) by hand in the direction as shown.
- Turn the first adjuster nut (5) till you cannot turn it by hand.

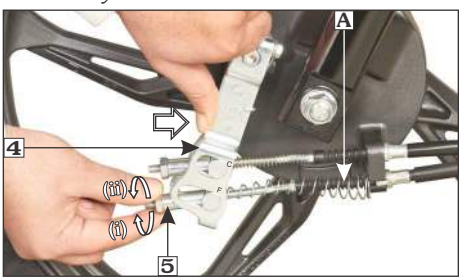


(4) Integrated brake arm (5) First adjuster nut
(i) Decrease free play (ii) Increase free play

- Check the free play of front brake lever.
  FREE PLAY: 10-20 mm
- If the free play is out specification turn the adjuster nut to obtain desired free play.

Integrated brake cable (B) on "C" side

Adjustment

- Push the integrated brake arm (4) by hand in the direction as shown.
- Turn the second adjuster nut (6) until a gap is created between joint (7) and the slot on the first side in integrated brake arm.
- After ensuring the gap, turn the second adjuster nut counterclockwise by half rotation.
- Check the free play of rear brake pedal.
  FREE PLAY: 20-30 mm
- If the free play is out specification turn the adjuster nut to obtain desired free play.

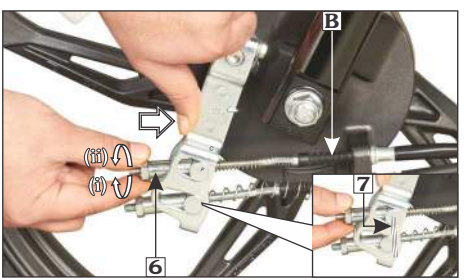

(6) Second adjuster nut (7) Joint
(i) Decrease free play (ii) Increase free play


NOTE

"F" & "C" is marked on integrated brake arm.

(e) Rear brake inspection

Adjustment


- Park the vehicle on its main stand.
- Measure the brake pedal (1) free play before the brake starts to take hold.
  Free play (2) should be 20-30 mm.

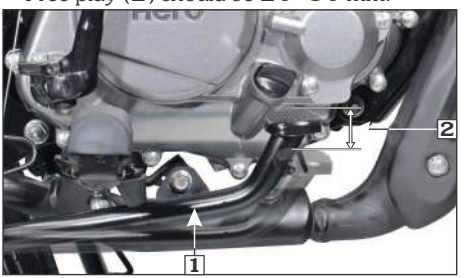


(1) Rear brake pedal
(2) Free play: 20-30 mm

- If adjustment is necessary, turn the rear brake adjusting nut (3).
- Make sure that the cut-out on the adjusting nut is seated on the brake joint pin (4) after the final adjustment has been made.
- Apply the brake several times and check for free wheel rotation when released.

CW- Clockwise, ACW- Anticlockwise

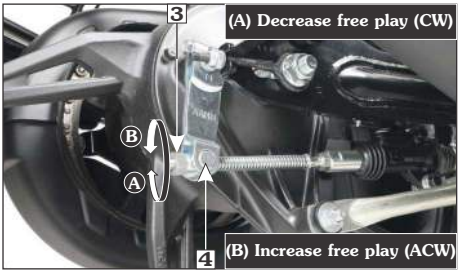

(3) Adjusting nut (4) Brake joint pin

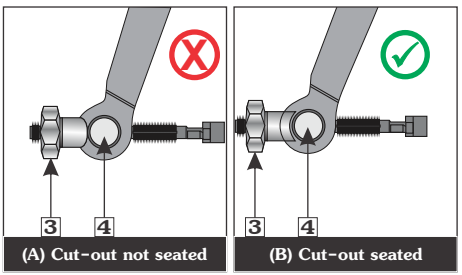

(3) Adjusting nut (4) Brake joint pin


NOTE

If proper adjustment cannot be obtained by this method, visit your Authorised Hero MotoCorp ***workshop.***

(f) Brake wear indicators


When the brake is applied, an arrow (1), fixed to the brake arm (2), moves towards a reference mark (3) on the brake panel (4). If the arrow aligns with the reference mark on full application of the brake, the brake shoes must be replaced.

Front brake wear indication (Drum variant)

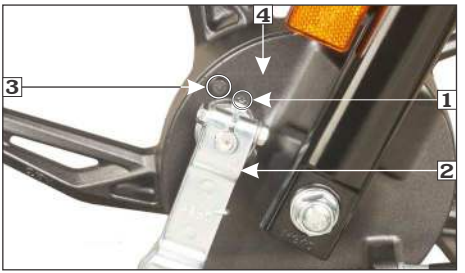

(1) Arrow (2) Brake arm
(3) Reference mark (4) Brake panel

Rear brake wear indication

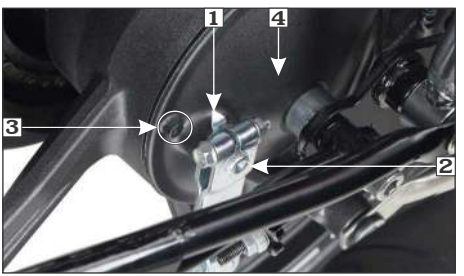

(1) Arrow (2) Brake arm
(3) Reference mark (4) Brake panel

SUSPENSION

Front and rear suspension inspection

- Check the front forks by locking the front brake and pumping the front fork up and down vigorously. The suspension action should be smooth and there should be no oil leakage.



- Check the rear shock absorber by pushing hard downwards on rear grip while the vehicle is not parked on stand. The suspension action should be smooth and there should be no oil leakage.

Rear shock absorber adjustment

Rear shock absorber adjustment can be made in any position from 1st to 5th according to the load/road conditions or owner's requirement.

Recommend adjustment

- Solo rider: 2nd position
- Rider + Pillion: 5th position



(1) Rear shock absorber **(2) Pin spanner**
(A) Stiffer **(B) Softer**

- In direction A: Stiffer
- In direction B: Softer

NOTE


Always adjust both the rear shock absorbers to the same position. To adjust the rear shock absorber (1), use the rear shock absorber adjustment tool (Pin spanner) (2) available in the tool kit.

WHEEL

(a) Front wheel (Disc variant)

Removal

- Support the vehicle securely on the main stand and raise the front wheel off the ground.
- Remove the front axle nut (1).
- Remove the axle (2) and the wheel (3).
- Remove the left & right side collars (4) from the wheel.

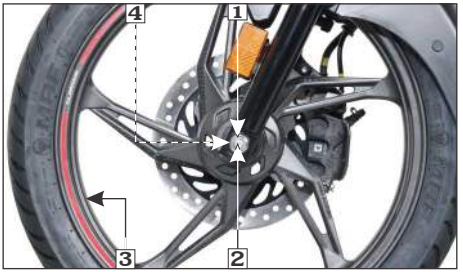

(1) Axle nut (2) Axle (3) Wheel
(4) Left & right side collars

! CAUTION

Do not operate front brake lever when the wheel is removed.

Installation

- Install the left & right side collars (1) to both sides of the wheel hub.
- Position the front wheel between the fork legs and align the disc between the brake pads to avoid damage to the pads. Insert the axle from the right side through the fork legs and wheel hub.
- Tighten the front axle nut to the specified torque.

TORQUE : 5.2 kgf-m



(1) Side collars


- After installing the wheel apply the brake several times and then check if the wheel rotates freely. Recheck the wheel if the brake drags or if the wheel does not rotate freely.

(b) Front wheel (Drum variant)

Removal

- Support the vehicle securely on the main stand and raise the front wheel off the ground.
- Disconnect the front brake cable (1) and integrated brake cable (2) from the integrated brake arm (3) and brake panel (4) by removing the front brake adjusting nut (5) and integrated brake adjusting nut (6).


- Remove the axle nut (7).
- Remove the axle (8) and wheel (9).
- Remove the side collar (10).

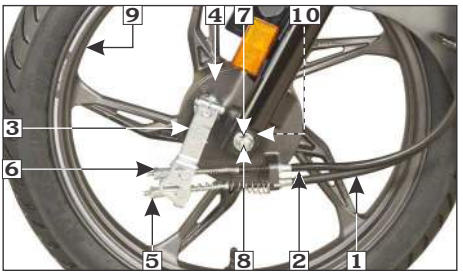

(1) Front brake cable (2) Integrated brake cable
(3) Brake arm (4) Brake panel
(5) Front brake adjusting nut
(6) Integrated brake adjusting nut (7) Axle nut
(8) Axle (9) Wheel (10) Side collar

Installation

- Reverse the removal procedure.
- Install the front wheel by ensuring that the lug (11) on the left fork is located in the slot (12) in the brake panel.
- Tighten the axle nut.
  Axle nut torque: 5.2 kgf-m
- Adjust the front brake free play and integrated brake free play **(page 72)**.
- After installing wheel, apply the brake several times and check for free wheel rotation when released.

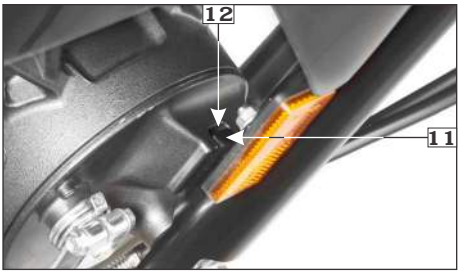


(11) Lug (12) Slot

(c) Rear wheel


Removal

- Support the vehicle securely on the main stand and raise the rear wheel off the ground.
- Remove the rear hugger fender.
- Remove the rear brake adjusting nut (1) and disconnect the brake rod (2) from the brake arm (3) by pushing down the brake pedal. Disconnect the brake stopper arm (4) from the brake panel (5) by removing split pin (6), lock nut (7) and washer (8).

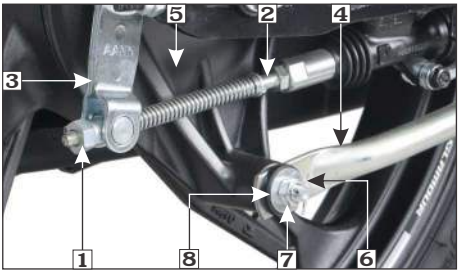

(1) Rear brake adjusting nut (2) Brake rod
(3) Brake arm (4) Brake stopper arm
(5) Brake panel (6) Split pin (7) Lock nut
(8) Washer

- Remove the rear axle nut (9).
- Pull out the axle (10) and collar (11).
- Remove the wheel.

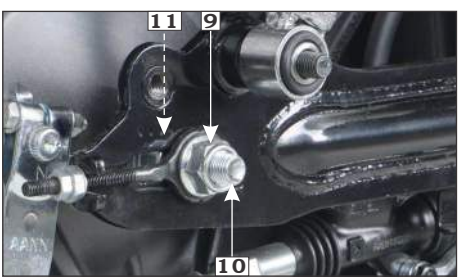

(9) Axle nut (10) Axle (11) Collar

Installation

- Reverse the removal procedure.

Axle nut torque: 5.2 kgf-m

Brake stopper arm nut torque: 2.2 kgf-m

- Adjust the rear brake free play **(page 72)** and drive chain slackness **(page 66)**.
- After installing the wheel, apply the brake several times and check for free wheel rotation when released.

! CAUTION

Always replace used split pins with new ones.

MAIN/SIDE STAND LUBRICATION

- Park the vehicle on the level surface.
- Check the main/side stand return spring for damage or loss of tension.
- Check the main stand (1)/side stand (2) for freedom of movement.
- Clean and lubricate the side stand pivot bolt (3) and rear brake pedal/main stand pivot (4).
- Make sure the side/main stand is not bent.



(1) Main stand (2) Side stand
(3) Side stand pivot bolt
(4) Rear brake pedal/Main stand pivot

TUBELESS TYRES

The tyres fitted on your vehicle are of TUBELESS type.

To safely operate your vehicle, your tyres must be of the proper type and size, in good condition with adequate tread, and correctly inflated for the load you are carrying.

The following pages give more detailed information on how and when to check the air pressure, how to inspect your tyres for damage, and what to do when your tyres need to be repaired or replaced.

Front	80/100-18 47P (Tubeless tyre)
Rear	100/80-18 53P (Tubeless tyre)

⚠ WARNING

- ***Using tyres that are excessively worn or improperly inflated can cause a crash in which you can be seriously hurt or killed.***
- ***Follow all instructions in this owner's manual regarding tyres inflation and maintenance.***

Air pressure

Keeping your tyres properly inflated provides the best combination of handling, tread life and riding comfort.

Generally, under-inflated tyres wear unevenly, adversely affect handling and are more likely to fail from being overheated.

Under inflated tyres can also cause wheel damage in rocky terrain.

Over-inflated tyres make your vehicle ride harshly, are more prone to damage from road hazards, and wear unevenly.

We recommend that you visually check your tyres before every ride and use a gauge to measure air pressure at least once a month or any time you think the tyres pressure might be low. Tubeless tyres have some self-sealing ability if they are punctured. However, because leakage is often very slow, you should look closely for punctures whenever a tyre is not fully inflated.

Always check air pressure when your tyres are "cold"-when the vehicle has been parked for at least three hours. If you check air pressure when your tyres are "warm"-when the vehicle has been ridden for even a few km-the readings will be higher than if the tyres were "cold". This is normal, so do not let air out of the tyres to match the recommended cold air pressures given below. If you do, the tyres will be under-inflated.

The recommended "cold" tyre pressures are:

	Rider only	Rider and Pillion
Front	1.75 kgf/cm^2 (25 psi)	1.75 kgf/cm^2 (25 psi)
Rear	2.00 kgf/cm^2 (29 psi)	2.30 kgf/cm^2 (33 psi)

! CAUTION

Over inflation/Under inflation will affect the performance.




(1) Air pressure gauge

Inspection


Whenever you check the tyre pressure, you should also examine tyre treads & side walls for wear, damage & foreign objects.

Look for:

- Bumps or bulges in the side of the tyre or the tread. Replace the tyre if you find any bumps or bulges.
- Cuts, splits or cracks in the tyre. Replace the tyre if you can see fabric or cord.

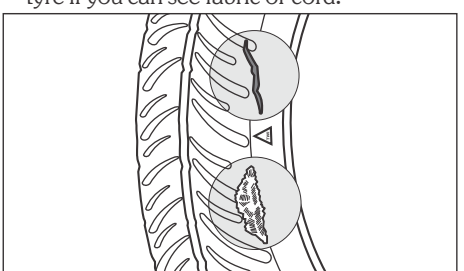

- Excessive tread wear.

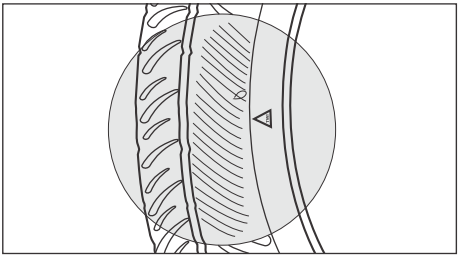

- Carefully inspect the tyres for any damage, if the vehicle hits a pothole or hard object.


Tread wear

Replace tyres immediately when the tread wear indicator **(1)** appears on the tyre. The tread limits are:

MINIMUM TREAD DEPTH:

Front: 1.0 mm **Rear:** 1.0 mm

Check the tread wear indicator for tyre wear.

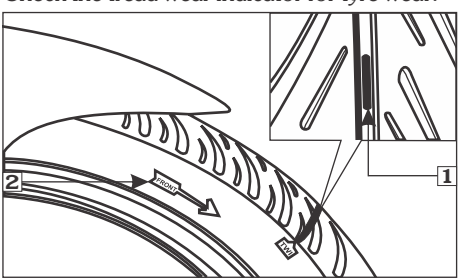

(1) Tread wear indicator (2) Arrow mark

Unidirectional tyres

Whenever the tyre is removed and put back in case of puncture, ensure the arrow mark (2) on the tyre is in the same direction as that of forward rotation of wheel.

Tyre repair

Repairing a puncture or removing a wheel requires special tools and technical expertise. If a tyre is punctured or damaged, it is advised to visit nearest tyre manufacture, Hero MotoCorp authorised dealer/workshop or the tyre repair shop who has expertise in repairing methods of tubeless tyre.

A tyre that is repaired either temporarily or permanently, will have lower speed and performance limits than a new tyre. After an emergency repair, always have the tyre inspected/replaced at our authorised dealer and replace the tyre if suggested.

You should not exceed 70 km/hour for the 1st 24 hours or 105 km/hour at any time thereafter. In addition, you may not be able to safely carry as much load as with a new tyre.

If you decide to have a tyre replace be sure the wheel is balanced before you ride.

Tyre replacement

The tyres that were installed on your vehicle were designed to match the performance capabilities of your vehicle and provide the best combination of handling, braking, durability and comfort.

⚠ WARNING

- ***Operation with excessively worn tyres is hazardous and will adversely affect traction and handling.***
- ***Under-inflation may result in the tyre slipping on or tyre coming off the rim.***
- ***Always use the size and type of tyres recommended in this owner's manual.***

NOTE

For repair and replacement of tyre it is advised to visit your Authorised Hero MotoCorp ***workshop.***

NOTE

The imported tyre(s) if fitted without ISI mark; are in compliance of BIS standard and Central Motor Vehicle Rules 1989, as declared by the Tyre manufacturer.

Important safety reminders

- Do not install a tube inside a tubeless tyre on this vehicle. Excessive heat buildup can cause the tube to burst.
- Use only tubeless tyres on this vehicle. The rims are designed for tubeless tyres, and during hard acceleration or braking, a tube-type tyre could slip on the rim and cause the tyre to rapidly deflate.

NUTS, BOLTS & FASTENERS

- Tighten bolts and nuts at regular interval shown in the maintenance schedule.
- Check that all chassis nuts and bolts are tightened to correct torque values.
- Check that all cotter pins, safety clips, hose clamps and cable stays are in place.



BATTERY

Refer to the safety precautions on **(page 53).**

Location

The battery is located behind the left side cover.

Specification

***MF Battery, 12V-4Ah/ETZ5**

It is not necessary to check the battery electrolyte level or add distilled water as the battery is a **Maintenance Free (sealed)** type. If your battery seems weak and electrolyte is leaking (causing hard starting or other electrical troubles), contact your Authorised Hero MotoCorp workshop.

***MF stands for Maintenance Free**

NOTE



This symbol on the battery means that this product must not be treated as household waste.



This symbol on the battery means the old battery must be returned to your Authorised Hero MotoCorp ***workshop as it must be treated as recyclable material.***

- ***Battery is a Maintenance-Free (sealed) type and can be permanently damaged if the sealing strip is removed.***
- ***An improperly disposed battery can be harmful to the environment and human health. Always confirm local regulations for battery disposal.***

Battery charging

Always visit your Authorised Hero MotoCorp workshop if you see any symptom of battery discharge as earliest as possible to get the battery charged. The battery has a tendency to discharge rapidly if optional electrical accessories are fitted on the vehicle.


Battery storage

- If in case your vehicle is not used for more than a month remove the battery, fully charge and store in a cool and dry place.
- If the battery is expected to be stored for more then two months, ensure to fully charge the battery once in a month.
- Always ensure the battery is fully charged before installation.

- Ensure the battery leads are properly connected to the battery terminals during installation.


Battery removal

- Make sure the ignition switch is "OFF" (⊗).
- Remove the seat **(pages 45)**.
- Remove the left side cover screws (1) and remove the side cover (2) by releasing the tabs from the slots (3) and lugs from the grommets (4).

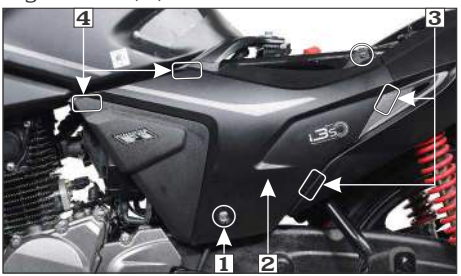

(1) Left side cover screws **(2) Side cover**
(3) Tab/slot **(4) Lugs/grommets**

- Remove the battery clamp bolt (5) and the battery clamp (6).
- Disconnect the negative (–)ve terminal lead (7) from the battery first, then disconnect the positive (+)ve terminal lead (8).
- Pullout the battery (9) from the battery box.

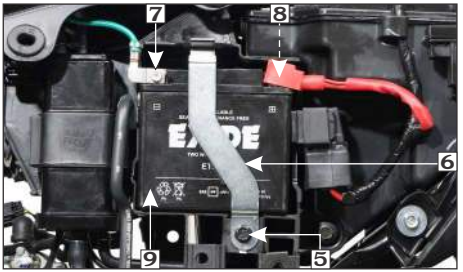

(5) Battery clamp bolt **(6) Battery clamp**
(7) (–)ve terminal **(8) (+)ve terminal**
(9) Battery


Battery installation

- Reinstall in the reverse order of removal. Be sure to connect the positive (+)ve terminal first, then the negative (–)ve terminal.
- Check all fasteners are secured properly.

FUSE REPLACEMENT

Fuse box (1)**:** Location: Mounted on the air cleaner assembly (2) left hand side.


Fuse type: Blade fuse
Circuit fuse (3) : 15A, 10A, 10A, 10A
Spare fuse (4) : 15A, 10A

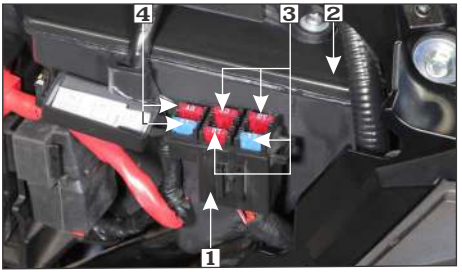

(1) Fuse box (2) Air cleaner assembly
(3) Circuit fuse: 15A, 10A, 10A, 10A
(4) Spare fuse: 15A, 10A

⚠ WARNING

- ***Never use a fuse with a different rating from that specified. It may lead to serious damage to the electrical system or a fire due to short circuit.***
- ***Battery gives off explosive gases. Keep sparks, flames & cigarettes away.***

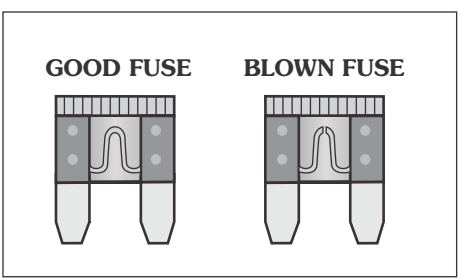


! CAUTION

- ***Do not attempt to start or ride the vehicle without a charged battery, it can cause fusing of the bulbs and permanent damage to certain electrical components.***
- ***Turn the ignition switch "OFF" before checking or replacing the fuse to prevent accidental short-circuiting.***

STOP LAMP SWITCH

The stop lamp switch (1) must be adjusted so that stop lamp will glow when rear brake is applied. Rear brake free play **(page 72)** should be adjusted before performing stop lamp switch adjustment. The procedure for adjusting stop lamp switch is as follows:

- Turn the ignition switch to the "ON" (Ω) position.

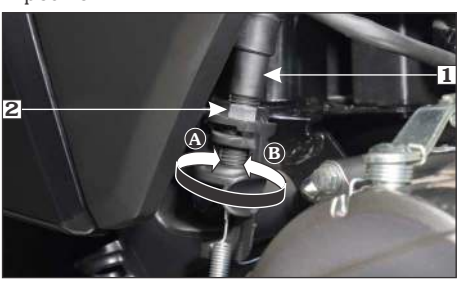


(1) Stop lamp switch (2) Adjusting nut
(A) Advance (B) Retard

- Turn the adjusting nut (2) to position stop lamp switch at a point where the stop lamp will glow just before the brake pedal is depressed to the limit of its free play. Turn the adjusting nut in direction (A) to advance switch timing or in direction (B) to retard switch timing.

HEADLAMP FOCUS ADJUSTMENT

Headlamp is factory preset. However in case of adjustment required, please follow the steps as given below:

- Headlamp adjustment is done by the headlamp adjusting bolt (1) located below headlamp.
- Park the vehicle on level ground.
- Turn the ignition switch to "ON" (ↀ) position and start the engine.
- Adjust the headlamp beam vertically by loosening the bolt & move the headlamp unit forward & backward for correct focus adjustment.

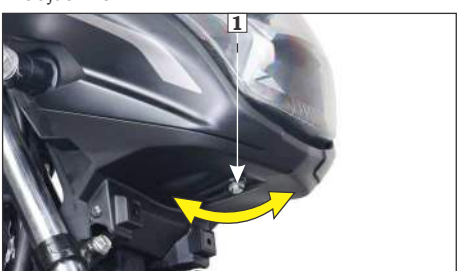

(1) Headlamp adjusting bolt

⚠ WARNING

An improperly adjust headlamp may blind oncoming rider/driver or it may fail to light the road for a safe distance.

CATALYTIC CONVERTER

This vehicle is equipped with the catalytic converter in the muffler to meet the emission norms.

The catalytic converter contains precious metals that serve as catalysts, promoting chemical reactions to convert the exhaust gasses without affecting the metals. The catalytic converter acts on HC, CO and NOx.

The catalytic converter must operate at a high temperature for the chemical reactions to take place. It can set on fire any combustible material that come near it. Park your vehicle away from high grasses, dry leaves, or other flammable material.

A defective catalytic converter contributes to air pollution and can impair your engine's performance.

Follow these guidelines to protect your vehicle's catalytic converter.

- Always use unleaded petrol. Even a small amount of leaded petrol can contaminate the catalyst metals, making the catalytic converter ineffective.
- Keep the engine in good running condition. A poorly running engine can cause the catalytic converter to overheat.

- If your engine is misfiring, backfiring, stalling, or otherwise not running properly, stop riding and turn "OFF" the engine. Have your vehicle serviced as soon as possible.



(1) Catalytic converter

EVAPORATIVE EMISSION CONTROL SYSTEM

This vehicle is equipped with an evaporative emission control system to meet emission standards. During warm weather, the petrol vapours which contain HC evaporates easily into the atmosphere from the fuel tank, if the fuel system is unsealed or open. The evaporative emission control system is used to prevent petrol vapours from escaping into the atmosphere from fuel tank. The canister **(1)** collects the fuel vapour from the fuel tank and then the fuel vapour is drawn into the engine for re-burning to avoid pollution caused by the fuel vapour diffused into the air.



(1) Canister

POLISHING OF VEHICLE


After washing your vehicle, wax all painted surfaces (except matte painted surfaces) using a commercially available polish/quality liquid or paste wax to finish the job. Use only a non abrasive polish or wax made specifically for automobiles. Apply the polish or wax according to the instructions on the container.

NOTE

Polishing or waxing is not applicable for models having matte paint.

1. STARTING TROUBLE – ENGINE DOES NOT START


A. Fuel system

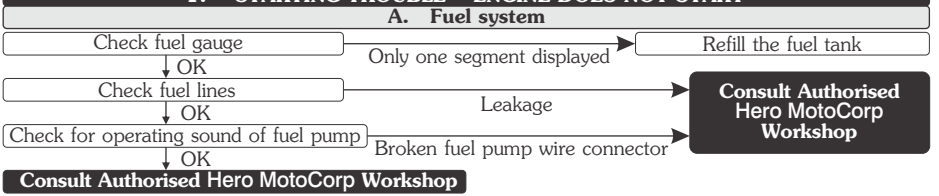


B. Side Stand Engine Kill System




C. Electric starter not working

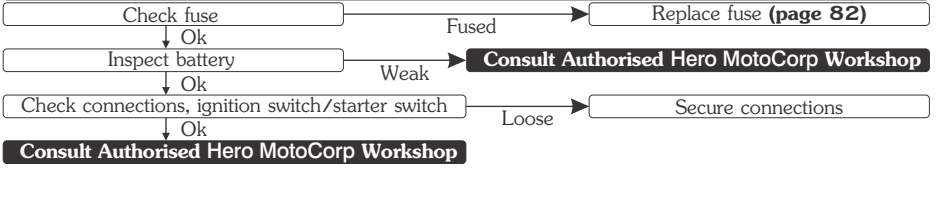

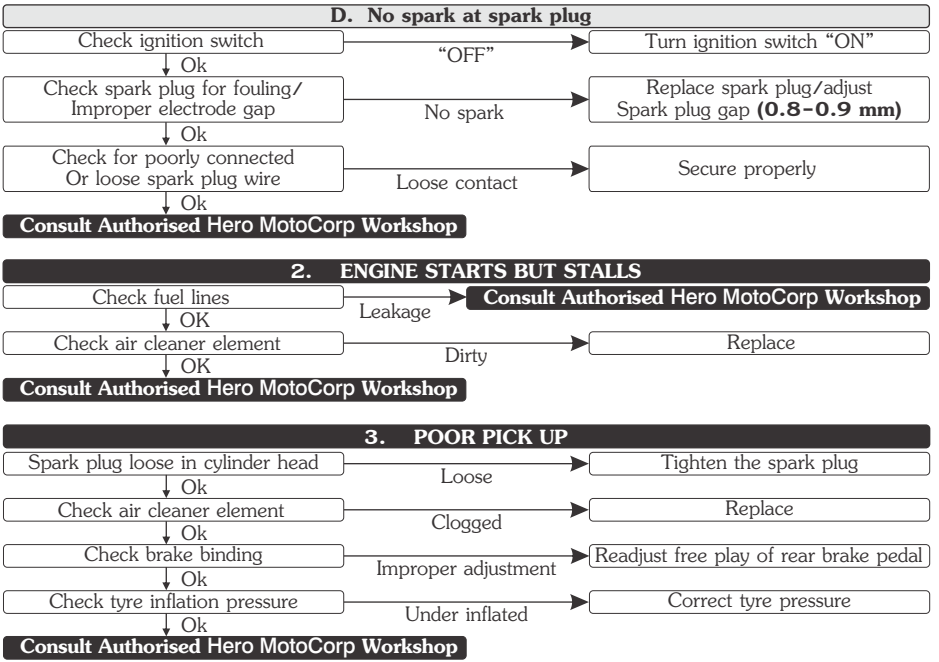

D. No spark at spark plug
Check ignition switch
"OFF"
Turn ignition switch "ON"
Ok
Check spark plug for fouling/ Improper electrode gap
No spark
Replace spark plug/adjust Spark plug gap (0.8–0.9 mm)
Ok
Check for poorly connected Or loose spark plug wire
Loose contact
Secure properly
Ok
Consult Authorised Hero MotoCorp Workshop
2. ENGINE STARTS BUT STALLS
Check fuel lines
Leakage
Consult Authorised Hero MotoCorp Workshop
OK
Check air cleaner element
Dirty
Replace
OK
Consult Authorised Hero MotoCorp Workshop
3. POOR PICK UP
Spark plug loose in cylinder head
Loose
Tighten the spark plug
Ok
Check air cleaner element
Clogged
Replace
Ok
Check brake binding
Improper adjustment
Readjust free play of rear brake pedal
Ok
Check tyre inflation pressure
Under inflated
Correct tyre pressure
Ok
Consult Authorised Hero MotoCorp Workshop

4. ELECTRICAL SYSTEM

Feeble horn sound or no light

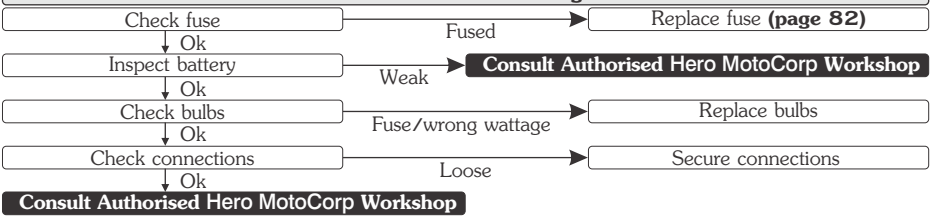

5. i3s SYSTEM

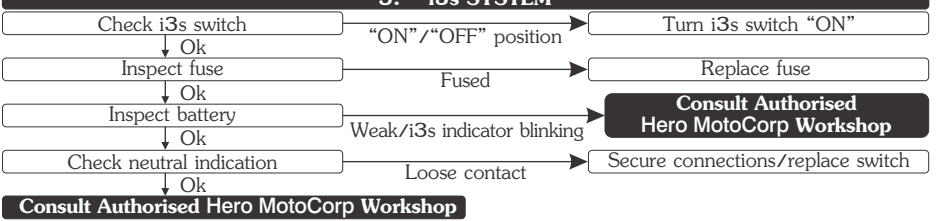

ROAD SIGNS

Mandatory signs: These road signs inform drivers/riders of the traffic rules that apply on a certain stretch of road, thereby instructing them on how to drive/ride. Mandatory signs are distinguished by the bright red circle with black and blue markings. It is imperative that all riders follow these signs as they help avoid accidents. Their violation can be penalised under the Motor Vehicle Act.

Mandatory


Stop


Give Way


One Way


No Horn


No Bicycles


No Automobiles


No Hand Cart


No Pedestrians


No Right Turn


No 'U' Turn


Overtaking Prohibited



Speed Limit


No Stopping or Standing


No Parking





Length Limit



High Limit


Restriction Ends


Compulsory-Ahead Only


Compulsory-Turn Left


Compulsory-Right Ahead


Compulsory-Ahead or Turn Right


Compulsory-Keep Left


Compulsory-Bicycle Track


Compulsory-Sound Horn

ROAD SIGNS



Cautionary signs: These signs inform the driver/rider of the road conditions ahead. Cautionary signs therefore serve as a warning. They are usually in a red triangle with black pictures on a white background. Illustrations, diagrams and symbols are used to forewarn about dangers ahead. Cautionary road signs are as important as mandatory signs. However, the violation of cautionary signs does not attract penalty.

Cautionary


Right Hand Curve


Right Reverse Bend



Incline Ahead


Narrow Road Ahead


Narrow Bridge


Pedestrian Crossing


School Ahead


Gap in Medium


Cross Road


Men at Work


Roundabout


Hump Road

ROAD SIGNS



Informatory signs: These are facility signs that provide important information about road directions are maps of specific destinations. On highways, they provide information about the location of public telephones, restaurants, hospitals, parking, petrol pumps, resting-places and more. These signs are usually rectangular, with black or white pictures on a blue background.

Informatory




Hospital


First Aid Post


Petrol Pump



Eating Place


Resting Place


Public Telephone



Place Identification Place



Destination Sign


Light Refreshment



Taxi Stand



Parking Both Sides




Parking This Side



No Through Road



No Through Side Road



Re-assure Sign

Signs and Signals are language of the road. Learn them, respect them.


NAVIGATION SIGNS

Navigation signs: Hero App and meter console of your vehicle will display step by step navigation guidance/direction through below navigation signs when your vehicle is in navigation mode with your smartphone.



Turn Left


Turn Right


Turn Slight Left


Turn Slight Right



Turn Sharp Left



Turn Sharp Right



Straight


Merge


Keep Left



Keep Right


Ramp Left


Ramp Right


Round About Left


Round About Right


U Turn Left


U Turn Right


Fork Left


Fork Right


Ferry


Ferry Train


Destination Reached



Wrong way

Hero MotoCorp Ltd.

WARRANTY

Scope of warranty

Hero MotoCorp Ltd. (hereinafter called 'Hero MotoCorp') warrants its **GLAMOUR XTEC CONNECT** vehicles, assembled/manufactured in its Plants and sold through its channel partners, to be free from any defect – both in material and workmanship, under normal use and conditions, subject to the following terms & conditions.

Terms & conditions

a) **GLAMOUR XTEC CONNECT** vehicle is warranted for a period of **5 years or 70000 Km**, whichever is earlier, from the date of purchase, emission warranty is separately covered under the head of "Emission Warranty".

b) It is advised that the purchaser avails all free and paid services from the Hero MotoCorp's authorized workshop as per the recommended schedule, to be eligible for warranty benefits. Each paid service should be availed within 90 days from the date of previous service or as per the recommended schedule, whichever is earlier.

c) If any problem is observed in **GLAMOUR XTEC CONNECT** vehicle, Hero MotoCorp's only obligation/ liability is to repair or replace that part/those parts which is/are considered to be the cause of such problem, provided however that such problem has not resulted due to misuse/improper handling etc. of the vehicle. Any **GLAMOUR XTEC CONNECT** vehicle needing repair should be brought to Hero MotoCorp's authorized workshop for necessary inspection and carrying rectification job.

LIMITATIONS OF WARRANTY

The warranty shall not apply—

(1) If all free services/paid services/oil top-ups are not availed as per the recommended schedule at Hero MotoCorp's workshop.

(2) If any other engine oil which is non compatible with the product is used other than SAE 10W30 SL Grade (JASO MA2).

(3) To normal wear & tear and ageing of components including (but not limited to) brake shoes/pads, clutch plates, drive chain & sprockets, bulbs, electrical wiring, filter, spark plug, fasteners, shims, washers, oil seals, gaskets, rubber parts, bush, rubber bellows, plastic parts breakage, wheel rim for misalignment/bend, steering ball race & cone, control cables such as brake cable/clutch cable, fuses (all types), steering handle for bend and sticker peel off.

(4) If additional wheel(s) is/are fitted and/or any other modification carried out/unauthorized accessories fitted which shall be responsible for malfunction/deterioration of the vehicle or modifications/ alterations are made to the vehicle which are not permissible under applicable laws, or modifications, alterations, tampering or improper repair are undertaken at unauthorised workshops.

(5) If any modifications/alterations/repairs are made to the vehicle which are (a) not as per applicable laws, and/or (b) are undertaken at unauthorized workshops.

(6) If there has been any tampering or improper repair undertaken.

(7) If **GLAMOUR XTEC CONNECT** vehicle has been used in any competitive events like races or rallies or for any commercial purposes or if any damage results from misuse or use beyond the limitation of the intended purpose or any damage due to use under abnormal conditions.

(8) To any damage on vehicle's painted surface cropping due to industrial pollution or other external factors.

(9) For normal phenomena like noise, vibration, oil seepage etc., which do not affect the performance, quality and/or function, of the vehicle.

(10) To any damage caused due to usage of improper oil/grease and/or non-genuine parts.

(11) If any defect crops or repairs needed as a result of using adulterated fuel.

(12) If any maintenance/repairs required due to bad road conditions or misuse of **GLAMOUR XTEC CONNECT** vehicle or required due to operation or use of the vehicle at any place or for such purpose for which the vehicle is not designed or manufactured.

(13) If any defect crops or repairs needed as a result of **GLAMOUR XTEC CONNECT** vehicle meeting with some accident.

(14) For consumables like oil, grease, gasket etc to be used during free services and/or warranty repairs.

(15) If any damage results from repair, adjustment or maintenance operations by any method other than the methods specified by Hero MotoCorp.

(16) If any damage results from operation, whether intentional or accidental, other than as specified in the Owner's Manual.

(17) To electrical components such as bulbs, fuses, electrical wiring cut due to external reasons (Rat bites etc.).

(18) Any cost for periodic maintenance such as cleaning, inspection and adjustment.

(19) To any part of the **GLAMOUR XTEC CONNECT** vehicle which has been tampered or repaired in such a manner which has resulted in malfunction of the vehicle.

(20) For **GLAMOUR XTEC CONNECT** vehicle not used in accordance with the guidelines given in this Owner's Manual.

(21) To proprietary items like tyres, tubes, batteries, etc, as they are subjected to the warranty terms & conditions of the respective manufacturers and directly handled by them only.

(22) Any defect(s) developing on account of external factors such as environmental factors; including but not limited to fading/peeling/rusting of paint and/or stripes and/or plated parts, seat leather tearing & cracking, aluminum parts oxidation and cracking & discoloring of control switches etc. or any damage resulting from soot and smoke, use of chemical, bird droppings or damage by sea water, sea breeze or salt.

(23) If any damage results from operation, whether intentional or accidental, other than as specified in the Owner's Manual.

(24) If the odometer of **GLAMOUR XTEC CONNECT** has been altered or tampered.

(25) If the Vehicle's Identification Number (VIN) or Engine number has been altered or removed, or any circumstances exist that makes it difficult or impossible to establish the true history, origin and warranty coverage of the vehicle or part in question.

(26) If any damage is caused due to a force majeure event, such as flood, fire, terrorist act, etc.

The terms and conditions governing the Warranty of Telematic Control Unit (TCU) can be referred to at TCU warranty page.

Hero MotoCorp shall not be liable for (a) any incidental, indirect or consequential damages/loss of any kind whatsoever, and (b) any delay in servicing beyond its control or the control of its authorised dealerships/workshops.

This warranty is only given by Hero MotoCorp and no employee, dealership, workshop or any other person is authorised to extend the warranty provided herein. Hero MotoCorp's obligation under this warranty shall be limited to repairing or replacing, free of cost, those parts of the vehicle which upon examination by the Hero MotoCorp may prove to the satisfaction of Hero MotoCorp to have a manufacturing defect.

Hero MotoCorp's **obligation under this warranty shall be limited to repairing or replacing, free of cost, those parts of the vehicle which upon examination by** Hero MotoCorp **may prove to the satisfaction of** Hero MotoCorp **to have a manufacturing defect. Decision regarding warranty settlement shall be taken by** Hero MotoCorp **and the same shall be final and binding on all concern.**

Subject to DELHI JURISDICTION only.

Hero MotoCorp Ltd.

BATTERY WARRANTY

Battery fitted in **GLAMOUR XTEC CONNECT** is a proprietary product of the battery manufacturer and shall be fulfilled and handled directly by the battery manufacturer; Hero MotoCorp shall not be liable for the same. The battery warranty shall be for the period and governed by the terms and conditions as mentioned herein below:

Warranty Period:

The battery is warranted by the battery manufacturer for a period of 18 months from date of sale of vehicle or 20000 km whichever is earlier.

Terms and conditions of warranty

1. Batteries are warranted against all defects in material and workmanship. Liability under this warranty is limited to making good of defects rising solely from the use of faulty material or workmanship during manufacturing and developing under proper use.

   The warranty commences from the date of delivery to the original purchaser of the vehicle.
2. In the event of any complaint the battery is to be returned complete with electrolyte to nearest battery service station or to the dealer. On inspection, battery will be returned or replaced.
3. This warranty card accompanies a battery sold as OEM fitment only. Claims should be supported with vehicle purchase invoice to enable processing.
4. The right to determine whether a battery needs repair or total replacement lies with the battery manufacturer. In case where the battery is replaced, the defective battery becomes the property of the company and no scrap rebate will be given for it. The warranty period on the battery being repaired/replaced shall commence from the date of sale of the original battery as stated in the original warranty card.
5. All liabilities under this warranty will cease if the battery is used on the vehicle other than that on which the battery was originally fitted and on the expiry of the warranty period as mentioned above.
6. Recharging is not covered under the purview of this warranty and shall be billed as extra. However, free of cost (FOC) battery replacement/ repair includes cost of charging.
7. This warranty does not cover damage to the battery caused by faulty electrical systems, incorrect charging and filling, improper handling of the battery by unauthorized dealers/auto electricians, maintenance, willful abuse, destruction by fire, collusion, theft or recharging.
8. Breakage of container and cover do not come under the purview of this warranty.
9. Adjudication and settlement of claim will take a couple of days as a battery has to be tested for the reported failure.
10. In case of tampering of the original wiring circuit in any manner whatsoever.
11. If a battery which is not recommended is fitted on the vehicle then such battery will not carry any warranty.
12. The applicable taxes which is leviable on the battery under repair or replacement will be borne by you (the customer).
13. You (the customer) are deemed to have read, understood and agreed to these conditions at the time of purchase of the vehicle.

Hero MotoCorp Ltd.

TELEMATIC CONTROL UNIT (TCU) WARRANTY♦

Telematic Control Unit (TCU) fitted in **GLAMOUR XTEC CONNECT** is a proprietary product of the TCU manufacturer and shall be fulfilled and handled directly by the TCU manufacturer; Hero MotoCorp shall not be liable for the same. The TCU warranty shall be for the period and governed by the terms and conditions as mentioned herein below:

PRODUCT WARRANTY

Except as provided herein, the warranty of the TCU is valid for 3 years from the date of purchase of the vehicle. The warranty on the TCU is only limited to manufacturing defects.

CONDITIONS OF WARRANTY:

1. Product warranty is only valid in India, and the product is not eligible for any international warranty.
2. Internal battery of TCU is covered under warranty for 12 months from date of purchase of vehicle.
3. eSIM is not covered under any warranty.

WARRANTY DOES NOT COVER THE FOLLOWING CASES:

1. General maintenance, cleaning, application update/installation, product demonstration, or any service other than repair/replacement.
2. Deterioration of the TCU caused by normal wear and tear, including but not limited to rust or stains or weather related reasons.
3. Customer induced damage, such as self-repairs, damage caused by misuse, tampering, alternation etc.
4. Physical abuse, tampering or damage to the TCU/vehicle.
5. Malfunction/s related to telecom operator dependencies like no/poor network, non-registration of e-SIM etc.
6. Removal/damage of warranty void sticker.
7. Damage to TCU due to fitment of non-genuine accessories or incorrect fitment from unauthorized workshops.
8. Serial number of TCU being illegible or having been removed, erased, defaced, altered and/or tampered.

♦ **Applicable for Connect Variant**

EMISSION WARRANTY

Scope of warranty

Hero MotoCorp Ltd. warrants all its vehicles, assembled/manufactured at its various Plants and sold through its channel partners, to comply with emission standards as specified in sub rule (2) of Rule 115 of Central Motor Vehicles Rules, 1989, subject to following terms & conditions.

Terms & conditions

a) The emission warranty shall be applicable in India and shall remain valid for a period of 3 years or 30000 km, whichever occurs earlier, from the date of vehicle purchase.

b) The parts, which are covered under emission warranty are fuel injector, fuel pump, throttle body, ignition coil, oxygen sensor and muffler ("Emission Related Component(s)").

c) In case any defect is observed in any Emission-Related Component(s) which are covered under emission warranty, Hero MotoCorp's only obligation/liability shall be to repair and/or replace those part (s) which is/are considered to be the cause of non-compliance with the emission standards.

d) The method (s) of examination to determine the warranty conditions of the Emission Related Component will be at the sole discretion of Hero MotoCorp and / or its channel partners / service center and result of such examination shall be final and binding. If on examination the warranty conditions of the Emission Related Component is / are not established, Hero MotoCorpwill have the right to charge all, or part of the cost of such examination / service charges to you in addition to the cost of the components.

e) Hero MotoCorp shall have the sole discretion to decide to replace the defective Emission Related Component or the entire assembly or any other part required for such repair.

f) The emission warranty shall be applicable only to those vehicles, which are being regularly maintained in accordance with the maintenance schedule provided in the Owner's Manual.

g) You should follow the recommended parts replacement as per the maintenance schedule in order to avail the emission warranty.

h) If any Emission Related Component is/are tampered and/or repaired by unauthorized person/ workshops etc, then the emission warranty shall stand cancelled.

i) Any Emission Related Component suffering from wear and tear under the normal course of running shall not be covered under the emission warranty. Therefore, all such parts should be replaced by you from time to time, on payment basis, as per the maintenance schedule provided in Owner's Manual and dealer's advice

EMISSION WARRANTY

j) It is recommended to avail the services as per the recommended schedule to be eligible for the emission warranty benefits. Please ensure that each paid service is availed within 90 days from the date of previous services or as per the recommended schedule, whichever is earlier.

k) It is mandatory to obtain a PUC certificate from the authorised PUC center. In case of non-compliance with the emission standards please contact the channel partner/authorised workshop immediately along with the previous OK certificate, for the necessary rectification. The manufacturer or the dealer is not responsible for any penalty levied on you on account of non-compliance with the emission standards.

l) Emission warranty shall not be applicable if

- The vehicle has been subjected to abnormal use, abuse, neglect and improper maintenance or has met with an accident.
- The vehicle, or parts including the Emission Related Component(s) thereof, has been altered, tampered with or modified or replaced in an unauthorized manner.
- The odometer is not functioning or the odometer and/or its reading has been changed/tampered with, so that the actual distance covered cannot be readily determined.
- The vehicle has been used for competitions, races, and rallies or for the purpose of establishing records.
- If any damage results to the Emission Related Component(s) covered under from repair, adjustment or maintenance operations by any method other than the methods specified by Hero MotoCorp.
- If any damage results from operation, whether intentional or accidental, other than as specified in the Owner's Manual.
- Any cost for periodic maintenance such as cleaning, inspection and adjustment.
- If any damage is caused to the Emission Related Component(s) due to a force majeure event, such as flood, fire, terrorist act, etc.

m) All decisions regarding emission warranty settlement shall be taken by Hero MotoCorp and shall be final binding on all concerned.

Subject to Delhi jurisdiction only.

Hero

GENUINE PARTS

WHAT ARE THE BENEFITS OF Hero MotoCorp GENUINE SPARE PARTS ?

- Assures long life
- Ensures economy for a long time
- Safety of vehicle and rider
- Peace of mind
- Value for money
- Assured quality

CONSEQUENTIAL DAMAGES ON USING NON-GENUINE PARTS

Clutch Plate	• Material used is inferior • Damages other parts of clutch like, clutch center and outer clutch • Affects fuel efficiency • Poor acceleration
Cam Chain Kit	• Poor performance • Reduced life
Gasket Cylinder Head	• Improper sealing • Engine knocking • Leads to leakage and smoky exhaust • Higher emission level

Hero

GENUINE PARTS

CONSEQUENTIAL DAMAGES ON USING NON-GENUINE PARTS

Element Air Cleaner	• Improper air filtration resulting in premature engine failure • Affects fuel efficiency • Poor engine performance
Spark Plug	• Frequent stalling of engine • Higher emission level • Poor engine performance • Affects fuel efficiency
Brake Pads/Shoes	• Poor braking efficiency • Rider safety-an issue • Discs/Drum wear out, resulting in subsequent repair cost
Chain Sprocket Kit	• Noisy Operation • Failure of chain can cause fatal accident

ZONAL/REGIONAL/AREA OFFICES

For any of your service related query/requirements you may contact the respective Zonal/Regional/Area Offices

CENTRAL ZONE

Hero MotoCorp Ltd., No. 208, 209, 210- 2nd floor, Ganpati Plaza, M.I. Road, Jaipur-302001, (Rajasthan). Tel: +91 141-2389031, 2389156, 2389252, E-mail: jaipur@heromotocorp.com

Hero MotoCorp Ltd., Office No. 705-706, 7th Floor, Manglam Fun Square, Durga Nursery Road, Udaipur -313001 (Rajasthan). Tel: +91 0294-2980578, 79, E-mail: udaipur@heromotocorp.com

Hero MotoCorp Ltd., Office. No.401, 4th Floor, Offizo, Magneto Mall, Labhandi, G.E. Road, Raipur -492 001, (Chhattisgarh) Tel: +91-771-4034749, E-mail: raipur@heromotocorp.com

Hero MotoCorp Ltd., Office No. 55 to 59, 1st Floor, Maple High Street, Opposite Aashima Mall, Hoshangabad Road, Bhopal-462026, India. Tel: +91-755-2994416, +91-755-2994398, E-mail: bhopal@heromotocorp.com

Hero MotoCorp Ltd., Maloo-01, 601-602, 6th Floor, Plot No. 26C, Scheme No. 94, Ring Road, Indore, M.P.-452010, Tel: +91-731-4978269, 70, E-mail: indore@heromotocorp.com

EAST ZONE

Hero MotoCorp Ltd., Flat No: 1002. 10th Floor, Martin Burn Business Park, BP3, Salt Lake, Sector-V, Kolkata-700091, West Bengal, India. Tel : +91-33-44026841,+91-33-44026830, E-mail : kolkata@heromotocorp.com

Hero MotoCorp Ltd., Odyssa Business Centre, Plot no. 30, 30/982, 172/1030, 4th Floor Cuttack, Bhubaneshwar highway road, Rasulgarh, Bhubaneswar-751010, Odisha, India. Tel: +91-674-2581161, 62, 63, 64, E-mail: bhubaneshwar@heromotocorp.com

Hero MotoCorp Ltd., Yash Heights, 1st Floor Bariatu Road, Above Basudeb Tata Showroom Ranchi-834009, Jharkhand, India. Tel: +91-651-2542222, 2542224, 2542225, E-mail: ranchi@heromotocorp.com

Hero MotoCorp Ltd., Sai Corporate Park, A Block, 6th Floor, Rukanpura, Bailey Road Patna, Bihar – 800014 Tel: +910612-2590587/88/89 E-mail: patna@heromotocorp.com

Hero MotoCorp Ltd., 158, Christian Basti, Golden Heights, 3rd Floor, Reliance Trend Building, Adjacent Central Mall, G.S. road, Kamrup, Assam-781005 Tel: 0361-2340058 E-mail: guwahati@heromotocorp.com

NORTH ZONE

Hero MotoCorp Ltd., 3rd Floor, Tower-A, DLF Centre Court, Sector-42, Golf Course Road, Gurgaon -122002, Haryana, India. Tel: 0124-4754800, E-mail: delhi@heromotocorp.com

Hero MotoCorp Ltd., 602, 6th Floor, Tower A, Plot No BW 58, Logix City Center, Sector-32, Noida – 201301. Uttar Pradesh Tel: 0120-4631000, E-mail: noida@heromotocorp.com

Hero MotoCorp Ltd., S.C.O-367-368, First Floor, Sector-34A, Chandigarh-160022, India. Tel: +91-172-2623773, 2623774, 2623775, E-mail: chandigarh@heromotocorp.com

NORTH ZONE

Hero MotoCorp Ltd., Kapoor Towers, Plot No- 284, 15-B, Rajpur Road, Dehradun-248001, Uttarakhand, India.
Tel:0135-2714661,2713662,2714663, E-mail: dehradun@heromotocorp.com

Hero MotoCorp Ltd., Summit Building (10th Floor) Plot No TCG 3/3 Vibhuti Khand, Gomti Nagar Lucknow – 226010, India. Tel: 0522-4006594, E-mail: lucknow@heromotocorp.com

Hero MotoCorp Ltd., C-19/134-B ,Third Floor I .P Grand, Lallapura, Sigra, Varanasi, Uttar Pradesh - 221010, India.
Tel: +91-0542- 2390949,2390241, E-mail: varanasi@heromotocorp.com

SOUTH ZONE

Hero MotoCorp Ltd., SKAV 909, 3rd Floor, 9/1, Lavelle Road, Bangalore-560001, India.
Tel: +91-80-46881000, E-mail: bangalore@heromotocorp.com

Hero MotoCorp Ltd., 3-6-289, 3rd Floor, Kareem Manzil, Hyderguda, Hyderabad-500029, India.
Tel:+91-40-23223735/3727, E-mail: hyderabad@heromotocorp.com

Hero MotoCorp Ltd., 9th Floor Seshachalam Centre No.636/1. Anna Salai, Nandanam, Chennai-600035, India.
Tel: +91-44- 24340974, 24340977, 24340978, E-mail: chennai@heromotocorp.com

Hero MotoCorp Ltd., 6-A, DD Trade Tower, (6th Floor), Kaloor-Kadavanthra Road, Kaloor-682 017, Kochi-682017, India. Tel: +91-0484- 4039646 -7, E-mail: cochin@heromotocorp.com

Hero MotoCorp Ltd., No 1547, 2nd Floor Classic Towers, Trichy Road, Coimbatore - 641018
Tel: +91-422-2200058, 2200061, E-mail: coimbatore@heromotocorp.com

Hero MotoCorp Ltd., First Floor VA Kalburgi Mahalakshmi Mansion, Mandakini Hospital Road, New Cotton Market, Hubli-580029, India. Tel: 0836-2269717, 2361038, E-mail: hubli@heromotocorp.com

Hero MotoCorp Ltd., D.NO. 54-11-18 E, 2nd Floor, Sai Oddessey Building, Opp Executive Club, Near NH-5, Vijayawada-520008, Andhra Pradesh, India. Tel: +91-866-2546859, E-mail: vijayawada@heromotocorp.com

WEST ZONE

Hero MotoCorp Ltd., Chrome Building, Sr. No. 33, Hissa-A-1/1/2, Plot - 2, Viman Nagar Avenue 2, Nagar Road, Pune-411014, India. Tel: +91-020-71903500, E-mail: pune@heromotocorp.com

Hero MotoCorp Ltd., 604, Gunjan Tower, Off Alembic Gorwa Road, Baroda-390023, India.
Tel: +91-265-2286569/2286570, E-mail: baroda@heromotocorp.com

Hero MotoCorp Ltd., Ground Floor, Block No.2, Vishnu Vaibhav Complex, 222, Palm Road, Civil Lines, Nagpur-440001 India. Tel: +91-712-2545990-91, E-mail: nagpur@heromotocorp.com

Hero MotoCorp Ltd., Classic Stripes House, 3rd Floor76/79, Makwana Lane, Takpada Off. Andheri-Kurla Road Marol, Andheri Easta, Mumbai-400059, India. Tel: +91-22-28562071, E-mail: mumbai@heromotocorp.com

Hero MotoCorp Ltd., B-201, 2nd floor, Pride Corporate Royal Park, Kalavad Road, Rajkot -360001
Tel: 0281-2460622, 2460623, E-mail: rajkot@heromotocorp.com

Hero MotoCorp Ltd.
Registered Office
The Grand Plaza, Plot No.2, Nelson Mandela Road, Vasant Kunj - Phase -II,
New Delhi - 110070, India. CIN: L35911DL1984PLC017354, PAN: AAACH0812J
Phone No.: 011-46044100. Fax No.: 011-26143198, 26143321.

Toll Free No.: 1800 - 266 - 0018
Website: www.heromotocorp.com

Publication No. 63ACLTE0HMCL